


PR-1300G

3-slot Half-size Compact Chassis

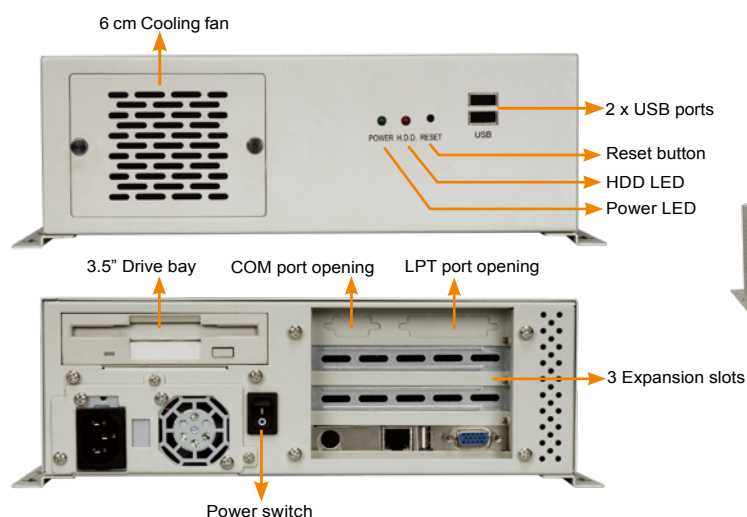

FDD and HDD are not included in package


Features

- ◆ RoHS compliant design
- ◆ One 3.5" drive bay
- ◆ Two USB ports on the front panel
- ◆ One, 6 cm cooling fan

Specifications

◆ Construction	Heavy duty metal
◆ SBC Form Factor	Half-size, slot SBC
◆ Drive Bays	1 x 3.5" (front accessible/HDD)
◆ Cooling Fans	1 x 6 cm
◆ I/O Ports	2 x USB
◆ I/O Openings	1 x LPT, 1 x COM
◆ Expansion Slots	3 slots
◆ Indicators	Power, HDD
◆ Buttons	Power switch, reset
◆ Operating Temperature	0°C ~ 50°C
◆ Operation Humidity	10% ~ 90%
◆ Color	W: White
◆ Weight (Net/Gross)	2.6 kg/5.2 kg
◆ Dimensions (DxWxH)	254 mm x 265 mm x 95.5 mm

Dimensions (measurement units: millimeter)

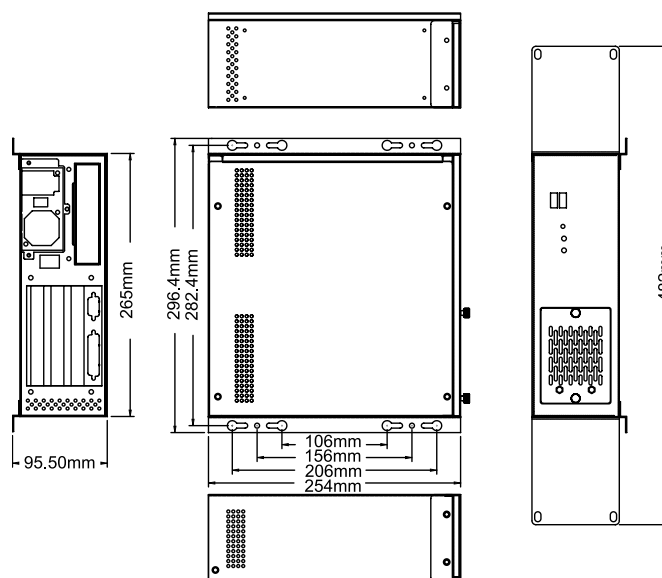

Backplane Options

Model No.	SBC Type	PCI	ISA	PCIe			PSU Connector
				x1	x4	x16	
BP-3S-RS	ISA	0	3	0	0	0	AT
IP-3S-RS	PCISA	2	0	0	0	0	AT
IP-3SA-RS	PCISA	2	0	0	0	0	ATX
HPE-3S1	PICO/PICOe	2	0	0	0	0	ATX
HPE-3S2	PICO/PICOe	1	0	0	1	0	ATX

Ordering Information

Part No.	Description
PR-1300GW-R11/A618A	3-slot Half-size Compact Chassis, White, 1 x 6cm fan, with ACE-A618A-RS-R11 (180W ATX model), RoHS

Power Supply Options

Type	Model No.	Watt
AT	ACE-916AP-RS	150W
ATX	ACE-A618A-RS-R11	180W

PR-1300G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.

1

Industrial
Computing
Solutions

2

Video
Capture
Solutions

3

Industrial
System

4

Industrial
Computer
Chassis

5

Power Supply/
Peripherals