

ETX® Module

High graphics performance with low power consumption

conga-EAF

Based on AMD Embedded G-Series Processors

Best price/performance ratio

High performance graphics


ETX®



AMD Fusion
FAMILY OF APUS
EMBEDDED TECHNOLOGY

Formfactor	ETX® Spec 3.02
CPU	AMD Embedded G-Series Processors AMD G-T56N 1.6 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 18 W) AMD G-T48N 1.4 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 18W) AMD G-T40N 1.0 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 9W) AMD G-T52R 1.5 GHz Single Core (L1 cache 64KB, L2 cache 512kB, 18W) AMD G-T44R 1.2 GHz Single Core (L1 cache 64KB, L2 cache 512kB, 9W) AMD G-T40R 1.0 GHz Single Core (L1 cache 64KB, L2 cache 512kB, 5.5 W) AMD G-T40E 1.0 GHz Dual Core (L1 cache 64KB, L2 cache 512kB x2, 6.5 W)
DRAM	Single channel up to one 4 GB DDR3 SO-DIMM memory (up to 1066 MHz)
Chipset	AMD A55E Controller Hub
Ethernet	10/100M Fast Ethernet, Realtek RTL8105E
I/O Interfaces	2x Serial ATA®, 2x EIDE (up to UDMA-66/100), 4x USB 2.0, PCI Bus (Rev. 2.3), ISA Bus, I2C (Fast Mode, 400 kHz, Multi Master), Floppy, LPT, 2x COM, PS/2
Sound	High Definition Audio Interface and Analog MIC, Line In, Line Out by on-module HDA codec
Graphics	Integrated High Performance Video, DirectX®11 graphics with UVD 3.0, Integrated VGA DAC, Dual Simultaneous Display Support, no PEG support
LVDS	2x24 Bit, 800x600 to 1920x1200@60Hz; VESA standard or JEDIA data mapping; Automatic Panel Detection via EDID/EPI
CRT	400 MHz RAMDAC, resolutions up to 2560x1600 - 18W APU, 1920x1200 - 9W APU
DisplayPort	1x DisplayPort 1.1a shared with HDMI port, resolutions up to 2560x1600 - 18W APU, 1920x1200 - 9W APU
HDMI or DVI	1x HDMI 1.3 Port, shared with DisplayPort, resolutions up to 1920x1080 / 1920x1200 for DVI mode
congatec Board Controller	Multi Stage Watchdog, non-volatile User Data Storage, Manufacturing and Board Information, Board Statistics, BIOS Setup Data, Backup, I²C bus (fast mode, 400 kHz, multi-master), Power Loss Control
Embedded BIOS Features	AMI-Aptio UEFI BIOS with congatec Embedded BIOS features
Security	The conga-EAF can be optionally equipped with a discrete "Trusted Platform Module" (TPM). It is capable of calculating efficient hash and RSA algorithms with key lengths up to 2,048 bits and includes a real random number generator. Security sensitive applications such as gaming and e commerce will benefit also with improved authentication, integrity and confidence levels.
Power Management	ACPI 3.0 with battery support
Operating Systems	Microsoft® Windows7, Microsoft® Windows XP, Microsoft® Windows® embedded Standard, Linux 2.6
Power Consumption	Typ. application: 9 .. 18 W., see manual for full details, CMOS Battery Backup
Temperature	Operating: 0 .. +60°C Storage: -20 .. +80°C
Humidity	Operating: 10 - 90% r. H. non cond. Storage: 5 - 95% r. H. non cond.

Block Diagram conga-EAF

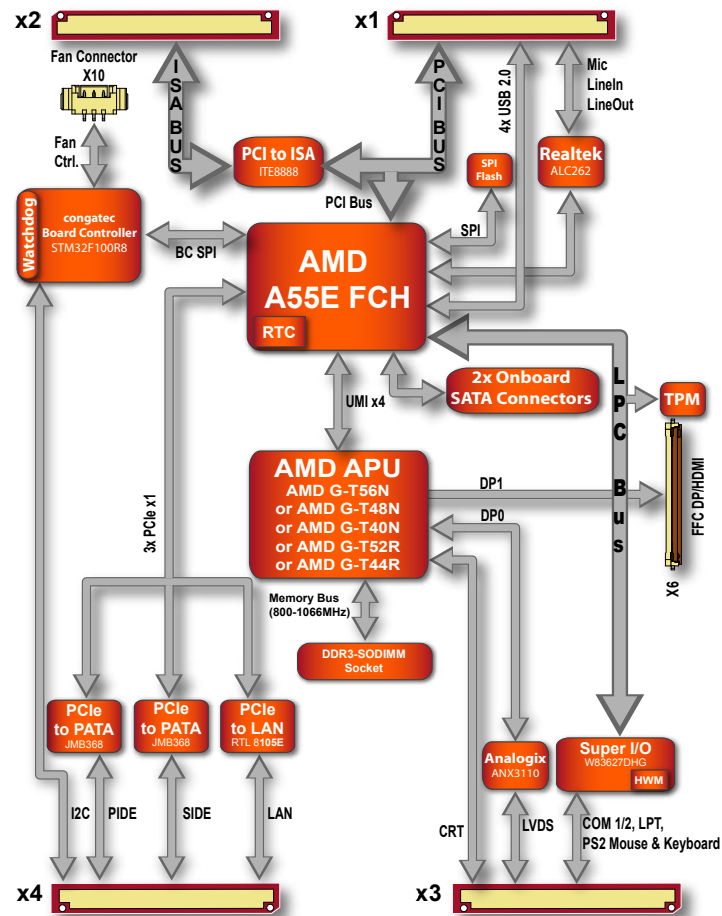

Order Information conga-EAF

Article	PN	Description
conga-EAF/T56N	041071	AMD Dual Core Processor T56N with 1.6GHz, 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 4GB.
conga-EAF/T48N	041072	AMD Dual Core Processor T48N with 1.4GHz, 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 4GB.
conga-EAF/T40N	041073	AMD Dual Core Processor T40N with 1.0GHz, 1MB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 4GB.
conga-EAF/T52R	041074	AMD Single Core Processor T52R with 1.5GHz, 512kB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 4GB.
conga-EAF/T44R	041075	AMD Single Core Processor T44R with 1.2GHz, 512kB L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 4GB.
conga-EAF/T40R	041076	AMD Ontario™ Single Core Processor T40R 1.0GHz, 1MByte L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 4GB.
conga-EAF/T40E	041077	AMD Ontario™ Dual Core Processor T40E 1.0GHz, 1MByte L2 cache and 1066MT/s DDR3 SODIMM memory interface for up to 4GB.
conga-EAF/HSP-B	041050	Standard heatspreader for ETX module conga-EAF. All stand-offs are with 2.7mm bore hole.
conga-EAF/HSP-T	041051	Standard heatspreader for ETX module conga-EAF. All stand-offs are M2.5mm threaded.
DDR3-SODIMM-1066 (1GB)	068750	DDR3-SODIMM memory module with 1 GB RAM (1066 MT/s)
DDR3-SODIMM-1066 (2GB)	068760	DDR3-SODIMM memory module with 2 GB RAM (1066 MT/s)
DDR3-SODIMM-1066 (4GB)	068765	DDR3-SODIMM memory module with 4 GB RAM (1066 MT/s)

Engineering Tools / Accessories for ETX®		
conga-EEVAL	033269	Evaluation carrier board for ETX-modules
conga-FPA2	047250	Flatpanel prototype adapter to develop your own flatpanel adapter including cables set.
XTX/ETX-carrierboard-socket-3	400006	Connector for ETX and XTX carrier boards, height 3.0 mm, packing unit 8 pieces
XTX/ETX-carrierboard-socket-9.5	400009	Connector for ETX and XTX carrier boards, height 9.5 mm, packing unit 8 pieces



Headquarter:

congatec AG
Auwiesenstraße 5
94469 Deggendorf,
Germany
Phone +49 (991) 2700-0
Fax +49 (991) 2700-111
info@congatec.com
www.congatec.de

Subsidiaries:

congatec AG Asia Pacific
11F-2, 341, Sec 4,
Zhong Xiao E. Rd.
106 Taipei City, Taiwan
Phone +886 2 2775 4645
Fax +886 2 2775 3263
sales-asia@congatec.com
www.congatec.tw

congatec, Inc.
2187 Newcastle Ave, Suite 201
Cardiff by the Sea,
CA 92007 USA
Phone +1 760-635-2600
Fax +1 760-635-2601
sales-us@congatec.com
www.congatec.us

congatec s.r.o.
Brojova 16
PS 326 00 Plzeň
Czech Republic

www.congatec.com

© 2009 congatec AG. All rights reserved.

conga, congatec and XTX™ are registered trademarks of congatec AG. Intel, Pentium and Intel Atom are trademarks of Intel Corporation in the U.S. and other countries. COM Express is a registered trademark of PICMG. Express Card is a registered trademark of the Personal Computer Memory Card International Association (PCMCIA). PCI express is a registered trademark of the Peripheral Component Interconnect Special Interest Group (PCISIG). CompactFlash is a registered trademark of the Compact Flash Association. Winbond is a registered trademark of the Winbond Electronics corp. AVR is a registered trademark of the Atmel corporation. ETX is a registered trademark of Kontron Embedded Modules GmbH. AMICORE8 is a registered trademark of American Megatrends inc. Microsoft®, Windows®, Windows NT®, Windows CE and Windows XP® are registered trademarks of Microsoft corporation. VxWorks is a registered trademark of WindRiver. All product names and logos are property of the respective manufacturers.

All data is for information purposes only. Although all the information contained within this document is carefully checked no guarantee of correctness is implied or expressed.

Vendite e supporto tecnico Italia

Contradata Milano S.r.l.
Via Solferino 12
20052 Monza (MB) Italy
Tel. (+39) 039.2301492
Fax (+39) 039.2301489
info@contradata.it
www.contradata.it



Contradata is a distributor of embedded computer technology and covers the entire Italian territory. The local sales staff is fully capable of helping customers to define their products and configurations. Support is supplied by a strong engineering team whose solid technical background can provide essential assistance to its customers. They're not only limited to hardware solutions but can also provide software assistance when dealing with today's most common operating systems i.e. WinCE, WinXPE and Linux.