

Open Frame AC Input AT Type

ACE-890A

86 W AC-DC Open Frame AT Power Supply




CB c US

SAFETY
REMARKS
TYPE APPROVED

PFC

Dimensions (Unit: mm)

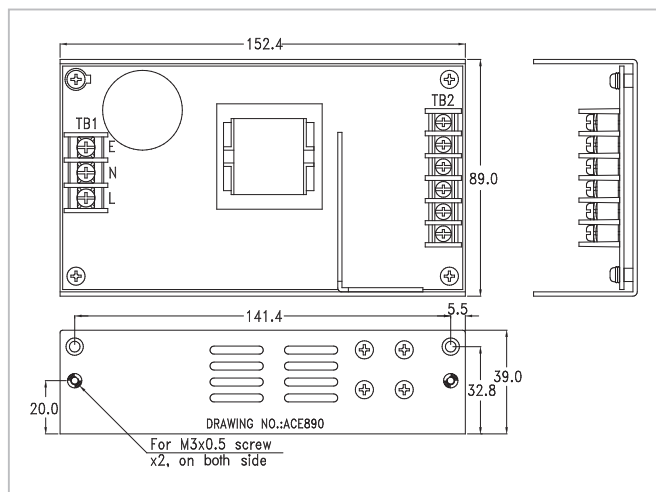

Input Type	85 ~ 264 VAC Full Range				
Input Frequency	47 Hz ~ 63 Hz				
Input Current	2A (RMS)@115VAC, 1A (RMS)@230VAC				
Inrush Current	25A max. for 115VAC, 50A max. for 230VAC				
Output Voltage	+5 V	+12 V	-5 V	-12 V	+24 V
ACE-890A	10 A	2.5 A		0.5 A	
Efficiency	70%				
Temperature	0°C ~ 50°C (Operating), -20°C ~ 85°C (Storage)				
MTBF (hrs)	268,000				
Output Connector	Optional cable				
Dimensions (mm)	152.4 x 89 x 39				

Ordering Information

Part No.	Description
ACE-890A-RS	86W AC-DC Open Frame AT Power Supply

ACE-870A

70 W AC-DC Open Frame AT Power Supply




CB c US

SAFETY
REMARKS
TYPE APPROVED

PFC

Dimensions (Unit: mm)

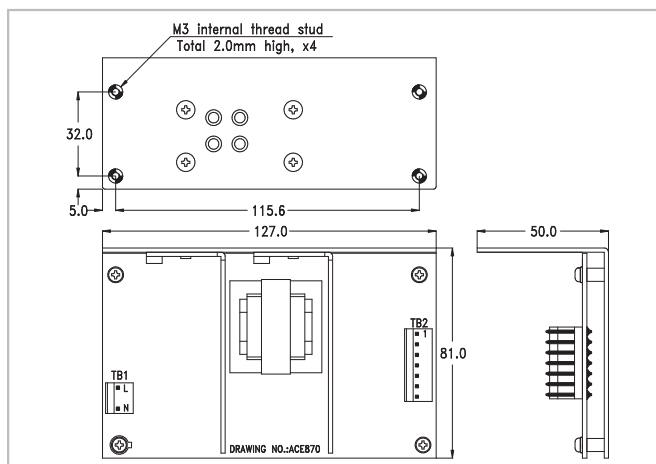

Input Type	85 ~ 264VAC Full Range				
Input Frequency	47 Hz ~ 63 Hz				
Input Current	1.5A (RMS)@115VAC, 0.8A (RMS)@230VAC				
Inrush Current	25A max. for 115VAC, 50A max. for 230VAC				
Output Voltage	+5V	+12V	-5V	-12V	+24V
	7A	2.5A	0.3A	0.3A	
Efficiency	70%				
Temperature	0°C ~ 50°C (Operating), -20°C ~ 85°C (Storage)				
MTBF (hrs)	296,000				
Output Connector	Optional cable				
Dimensions (mm)	127 x 81 x 50				

Ordering Information

Part No.	Description
ACE-870A-RS	70W AC-DC Open Frame AT Power Supply

Option 1



AT P8P9 Backplane Solution

PN: CB-870P8P9-RS

30 cm DC cable AT power to P8P9, HDD and SATA connectors

1

Industrial
Computing
Solutions

2

Video
Capture
Solutions

3

Industrial
System

4

Industrial
Computer
Chassis

5

Power Supply/
Peripherals