


IMBA-H610

ATX motherboard supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® H61, DDR3, VGA/DVI-D, dual Realtek PCIe GbE, SATA 3Gb/s, USB 2.0, HD Audio and RoHS

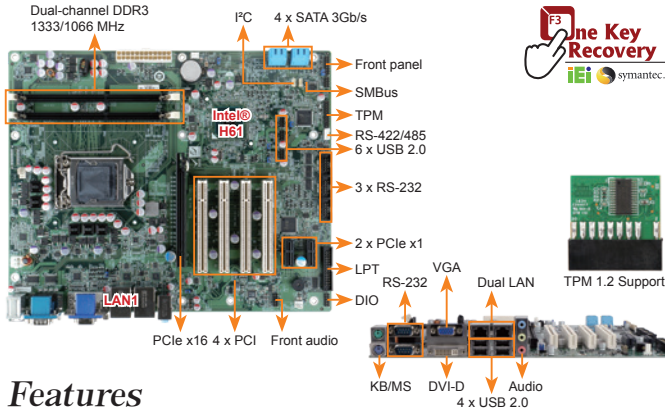

Features

- LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor supported
- Up to 32GB 1333 MHz dual-channel DDR3 SDRAM
- Intel® HD Graphics technology integrates high-performance graphics and media processing
- TPM V1.2 hardware security provided by the TPM module
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: LGA1155 socket supports Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor
- ◆ Chipset: Intel® H61
- ◆ Memory: Two 240-pin 1333/1066 MHz dual-channel DDR3 SDRAM unbuffered DIMMs support up to 16 GB
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet: LAN1: Realtek RTL8111E PCIe GbE controller with ASF 2.0 support; LAN2: Realtek RTL8111E PCIe GbE controller
- ◆ Graphics Engine: Intel® HD Graphics 2000/3000 (based on CPU type); Supports DX10.1 and OpenGL 3.0; Full MPEG2, VC1, AVC Decode
- ◆ Display Output: Dual independent display; 1 x VGA (up to 2048x1536@75Hz); 1 x DVI-D (up to 1920x1200@60Hz)
- ◆ Audio: Realtek ALC662 HD codec supports 5.1-channel 3 x Audio jacks (line-out, line-in, mic-in) on rear I/O; 1 x Front audio (2x5 pin)
- ◆ TPM: 1 x TPM (2x10 pin)
- ◆ SMBus: 1 x SMBus (1x4 pin)
- ◆ I°C: 1 x I°C (1x4 pin)
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ External I/O Interface: 1 x KB/MS, 2 x RS-232, 4 x USB 2.0
- ◆ Internal I/O Interface: 1 x LPT(2x13 pin, P=2.54); 1 x RS-422/485 (1x4 pin, P=2.0); 4 x RS-232 (2x5 pin, P=2.54); 4 x SATA 3Gb/s (AHCI supported); 6 x USB 2.0 (2x4 pin, P=2.54)
- ◆ Front Panel: 1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ Expansion: 1 x PCIe x16 slot, 2 x PCIe x1 slot, 4 x PCI slot
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Fan Connector: 1 x CPU smart fan (1x4 pin), 2 x System fan (1x3 pin)
- ◆ Power Supply: ATX power supply
- ◆ Power Consumption: 3.3V@1.27A, 5V@3.87A, 12V@0.54A, Vcore@7.67A, 5VSb@0.15A (Intel® Core™ i7-2600K 3.40GHz CPU with two 1333 MHz 2 GB DDR3 memory)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 244 mm x 305 mm
- ◆ Weight: GW: 1200g / NW: 700g
- ◆ CE/FCC compliant

Packing List


1 x IMBA-H610 single board computer	
4 x SATA cable	1 x Mini jumper pack
1 x I/O shielding	1 x Utility CD
1 x One Key Recovery CD	1 x QIG

Ordering Information

Part No.	Description
IMBA-H610-R10	ATX motherboard supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® H61, DDR3, VGA/DVI-D, dual Realtek PCIe GbE, USB 2.0, SATA 3Gb/s, HD Audio and RoHS
19800-000049-RS	LPT flat cable, 240mm, P=2.54
19800-003100-100-RS	Dual port USB cable with bracket, 300mm, P=2.54
19800-020100-100-RS	RS-232 cable with bracket, Dual 10-pin to dual DB-9, 230mm, P=2.54
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0
CF-115XA-R10	High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156C-R20	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-R20	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
CF-115XE-R10	High-performance LGA1155/LGA1156 cooler kit, 95W
CPU-DT-C-G440	Intel® Celeron® G440 processor, LGA1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i3-2120T	Intel® Core™ i3-2120T processor, LGA1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i5-2390T	Intel® Core™ i5-2390T processor, LGA1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i5-2500T	Intel® Core™ i5-2500T processor, LGA1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-P-G630T	Intel® Pentium® G630T processor, LGA1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-1156C-R20 CPU cooler
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17

IMBA-Q670-R30

ATX motherboard supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® Q67, DDR3, VGA/DVI-D/HDMI, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS

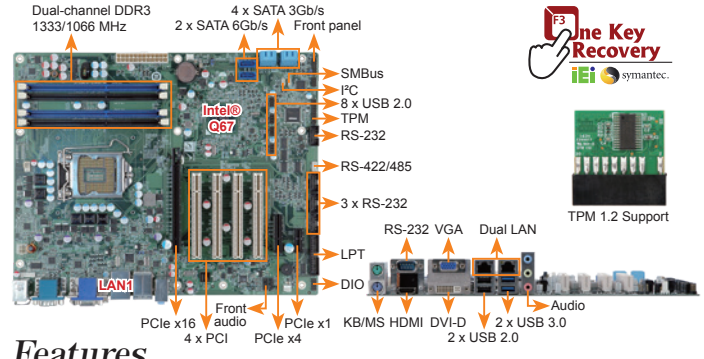

Features

- LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor supported
- Up to 32 GB 1333 MHz dual-channel DDR3 SDRAM
- Intel® PCIe GbE with Intel® AMT 7.0 support
- USB 3.0 and SATA 6Gb/s supported
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: LGA1155 socket supports Intel® Core™ i7/i5/i3/Pentium®/Celeron® processor
- ◆ Chipset: Intel® Q67
- ◆ Memory: Four 240-pin 1333/1066 MHz dual-channel DDR3 SDRAM unbuffered DIMMs support up to 32 GB
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet: LAN1: Intel® 82583V PCIe controller; LAN2: Intel® 82579 PHY with Intel® AMT 7.0 supported
- ◆ Graphics Engine: Support for DX10.1 and OpenGL3.0; Full MPEG2, VC1, AVC Decode
- ◆ Display Output: Dual independent display; 1 x VGA (up to 2048x1536@75Hz); 1 x HDMI (up to 1920x1200@60Hz); 1 x DVI-D (up to 1920x1200@60Hz)
- ◆ Audio: Realtek ALC662 HD Audio codec; 3 x Audio jacks (line-out, line-in, mic-in) on rear I/O; 1 x Front audio (2x5 pin)
- ◆ TPM: 1 x TPM (2x10 pin)
- ◆ SMBus: 1 x SMBus (1x4 pin)
- ◆ I°C: 1 x I°C (1x4 pin)
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ External I/O Interface: 1 x KB/MS, 2 x USB 2.0, 1 x RS-232, 2 x USB 3.0
- ◆ Internal I/O Interface: 1 x KB/MS (1x6 pin), 1 x LPT (2x13 pin, P=2.54), 1 x RS-422/485 (1x4 pin, P=2.0), 2 x SATA 6Gb/s (RAID 0/1/5/10 supported), 4 x RS-232 (2x5 pin, P=2.54), 4 x SATA 3Gb/s (RAID 0/1/5/10 supported), 8 x USB 2.0 (2x4 pin, P=2.54)
- ◆ Expansion: 1 x PCIe x16 slot, 1 x PCIe x1 slot, 1 x PCIe x4 slot, 4 x PCI slots
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Fan Connector: 1 x CPU smart fan (1x4 pin), 2 x System fan (1x3 pin)
- ◆ Power Supply: ATX/AT power supply
- ◆ Power Consumption: 3.3V@1.65A, 5V@6.31A, 12V@0.18A, Vcore@7.88A, 5VSb@0.15 (Intel® Core™ i5-2400 3.10GHz CPU with four 4 GB 1333 MHz DDR3 memory)
- ◆ Operating Temperature: -10°C ~ 60°C
- ◆ Storage Temperature: -20°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 244mm x 305mm
- ◆ Weight: GW: 1200g / NW: 700g
- ◆ CE/FCC compliant

Packing List

1 x IMBA-Q670 single board computer	
1 x I/O shielding	1 x Mini jumper pack
4 x SATA cable	1 x Utility CD
1 x One Key Recovery CD	1 x QIG

Ordering Information

Part No.	Description
IMBA-Q670-R30	ATX motherboard supports LGA1155 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU with Intel® Q67, DDR3, VGA/DVI-D/HDMI, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS
19800-000049-RS	LPT flat cable, 240mm, P=2.54
19800-003100-300-RS	Dual port USB cable with bracket, 300mm, P=2.54
19800-020100-100-RS	RS-232 cable with bracket, Dual 10-pin to dual DB-9, 230mm, P=2.54
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-003800-300-RS	RS-422/485 cable, 200mm
CF-115XA-R10	High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156C-R20	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-R20	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
CF-115XE-R10	High-performance LGA1155/LGA1156 cooler kit, 95W
CPU-DT-C-G440	Intel® Celeron® G440 processor, LGA1155, single core 1.6GHz, 1M cache, 35W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i3-2120T	Intel® Core™ i3-2120T processor, LGA1155, dual core 2.6GHz, 3M cache, 35W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i5-2390T	Intel® Core™ i5-2390T processor, LGA1155, dual core 2.7GHz, 3M cache, 35W, AMT, compatible with CF-1156C-R20 CPU cooler
CPU-DT-i5-2500T	Intel® Core™ i5-2500T processor, LGA1155, quad core 2.3GHz, 6M cache, 45W, compatible with CF-1156C-R20 CPU cooler
CPU-DT-P-G630T	Intel® Pentium® G630T processor, LGA1155, dual core 2.3GHz, 3M cache, 35W, compatible with CF-1156C-R20 CPU cooler
TPM-IN01-R20	20-pin Infineon TPM module, software management tool, firmware v3.17

1

Industrial Computing Solutions

2

Video Capture Solutions

3

Industrial System

4

Industrial Computer Chassis

5

Power Supply/Peripherals