Datasheet

1.8" SATA SSD 3MR3-P series

- 1.8" SATA III solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Enhanced power cycling management



Introduction


Innodisk 1.8" SATA SSD 3MR3-P is SATA III 6Gb/s Flash based disk, which delivers excellent performance and reliability, making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 1.8" SATA SSD 3MR3-P not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.



Contact us for more information about the 1.8" SATA SSD 3MR3-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

1.8" SATA SSD 3MR3-P series Drawing

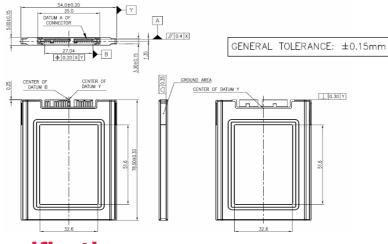

Specifications

Interface	SATA III
Flash Type	MLC
Capacity	8GB~512GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	460 / 240
Max. Power Consumption	5 W (5V x 1A)
Thermal Sensor	\checkmark
External DRAM Buffer	\checkmark
H/W Write Protect	-
ATA Security	\checkmark
S.M.A.R.T.	\checkmark
Dimension (WxLxH)	54.0 X 78.5 X 5.00 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

© 2016 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

20160328

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB	512GB
Standard Grade	DRS18-						
(0°C ~ +70°C)	08GD70BC1SC	16GD70BC1SC	32GD70BC1DC	64GD70BC1QC	A28D70BC1QC	B56D70BC1QC	C12D70BC1QC
Industrial Grade	DRS18-						
(-40°C ~ +85°C)	08GD70BW1SC	16GD70BW1SC	32GD70BW1DC	64GD70BW1QC	A28D70BW1QC	B56D70BW1QC	C12D70BW1QC



Contradata Milano S.r.l.

Via Solferino 12 20900 Monza (MB) - Italy Tel: (+39) 039-230.14.92 Email: info@contradata.it