

Flat Touch monitor

Thin profile , rounded corners , bezel -less



Features :


- * 15" VGA 1024 x 768 LCD panel with LED backlight for power saving and environmental protection
- * 0°C ~ 50°C range operating temperature
- * PCAP touchscreen
- * Multi-touch PCT touchscreen with USB interface
- * Flexible signal interface: VGA, DVI
- * VESA mounting
- * IP65 front panel compliant
- * True flat surface
- * 9~36Vdc Power in

Model No: FAD-150



Main Specifications

Display	Model	FAD-150PW-DN
	Size	15" LED Panel
	Resolution	1024 x 768 (XGA)
	Viewing Angle	80° /80° (H), 70° /80° (V)
	Brightness	350 (cd/m ²)
	Support color	16.2M colors
	Contrast ratio	800:1
	Response time	8 msec
Touchscreen	Backlight life(hrs)	50,000 hrs
	Touchscreen type	PCT Multi-touch touchscreen
	Surface Hardness	≥6H
Environment	Transparency	>85%
	Operating Temperature	0 ~ 50°C(32~122° F)
Mechanical	Storage Temperature	-20~60°C(-4~140° F)
	Construction	Metal chassis with Aluminum profile
	Mounting	VESA mounting
	Dimension	361.3 x 285.3 x 51.94 (mm)
System	Net Weight	4.10kgs
	I/O	VGA x 1,DVI x 1 ,USB x 1 for Touch ,phoenix connector x 1 for DC power in
	Power input	9~36Vdc in ,
	Power Consumption	14.5Watt
Accessories	EMC compliance	CE/FCC
	Optional Items	VGA cable x 1 , USB cable x 1 , Phoenix male connector x 1
		DVI cable (1.5 m)

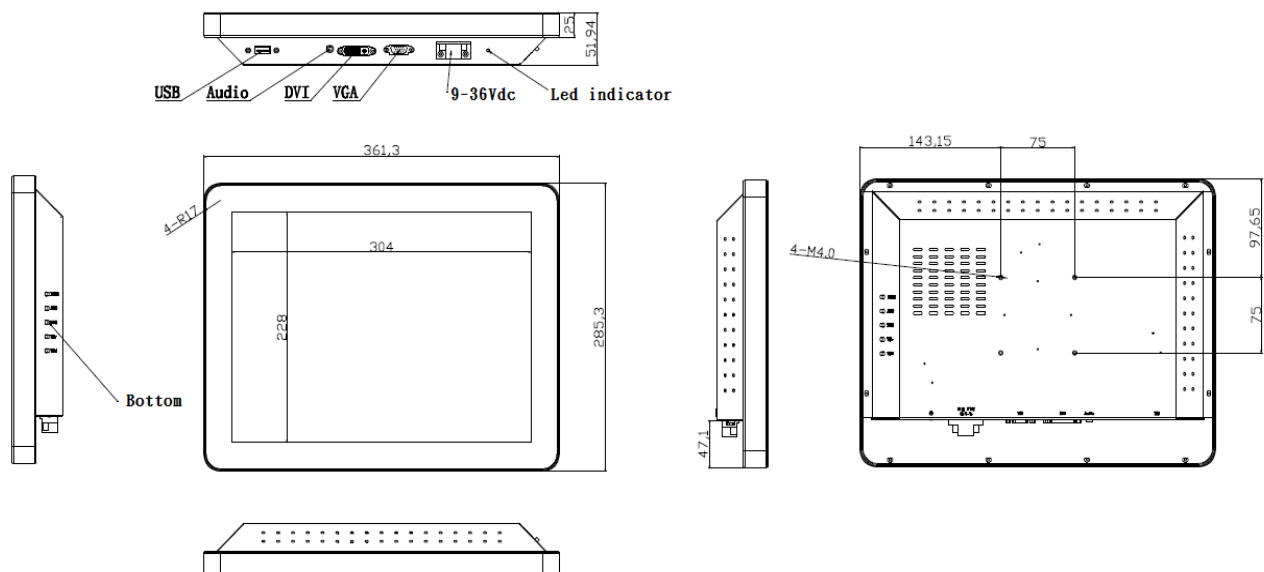

*Note: This is a simplified drawing and some components are not marked in detail. Please contact us for product detail information.