

Flat Touch monitor

Thin profile , rounded corners , bezel -less



Features :




- * 19" VGA 1280 x 1024 LCD panel with LED backlight for power saving and environmental protection
- * 0°C ~ 50°C range operating temperature
- * PCAP touchscreen
- * Multi-touch PCT touchscreen with USB interface
- * Flexible signal interface: VGA, DVI
- * VESA mounting
- * IP65 front panel compliant
- * True flat surface
- * 9~36Vdc Power in

Model No: FAD-190



Main Specifications

Display	Model	FAD-190PW-DN & FAD-190PW-D1
	Size	19" LED Panel
	Resolution	1280 x 1024 (SXGA)
	Viewing Angle	85° /85° (H), 80° /80° (V)
	Brightness	FAD-190PW-DN: 350 (cd/m ²) / FAD-190PW-D1: 250 (cd/m ²)
	Support color	16.7M colors
	Contrast ratio	1000:1
	Response time	FAD-190PW-DN 10 msec / FAD-190PW-D1 5 msec
Touchscreen	Backlight life(hrs)	FAD-190PW-DN: 70,000 hrs / FAD-190PW-D1: 30000 hrs
	Touchscreen type	PCT Multi-touch touchscreen
	Surface Hardness	≥6H
Environment	Transparency	>85%
	Operating Temperature	0 ~ 50°C(32-122° F)
	Storage Temperature	-20~60°C(-4~140° F)
Mechanical	Construction	Metal chassis with Aluminum profile
	Mounting	VESA mounting
	Dimension	427.4 x 352.4 x 51.94 (mm)
	Net Weight	5.3kgs
System	I/O	VGA x 1,DVI x 1 ,USB x 1 for Touch ,phoenix connector x 1 for DC power in
	Power input	9~36Vdc in ,
	Power Consumption	FAD-190PW-DN: 24 Watt / FAD-190PW-D1: 18.38 Watt
	EMC compliance	CE/FCC
Accessories	VGA cable x 1 , USB cable x 1 , Phoenix male connector x 1	
Optional Items	DVI cable (1.5 m)	

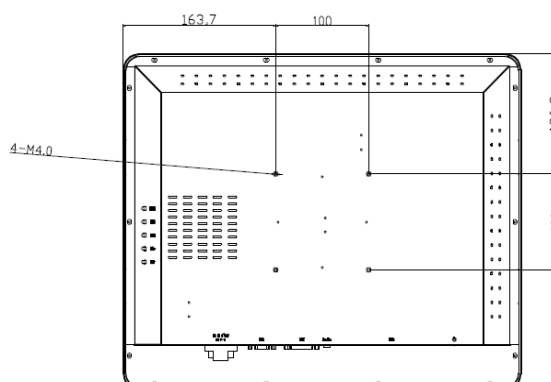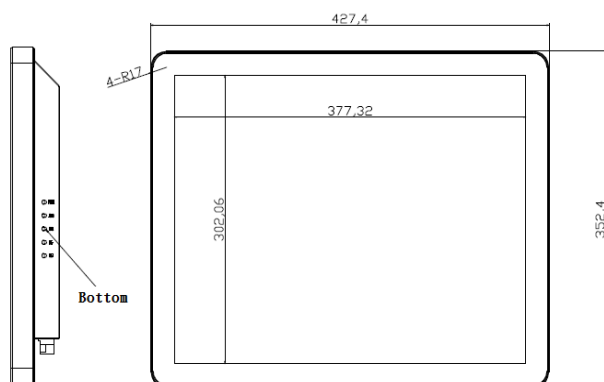

*Note: This is a simplified drawing and some components are not marked in detail. Please contact us for product detail information.