

Flat Touch Monitor

Thin profile , rounded corners , bezel -less



Features :



- * 21.5" Full HD 1920 x 1080 LCD panel with LED backlight for power saving and environmental protection
- * 0 ~ 50°C range operating temperature
- * PCAP touchscreen or 3mm tempered protected glass
- * Multi-touch PCT touchscreen with USB interface
- * Flexible signal interface: VGA, DVI & optional HDMI
- * VESA mounting
- * IP65 front panel compliant
- * True flat surface
- * 9~36Vdc Power in

Model No: FAD-215



Main Specifications

Display	Model	FAD-215PW-DN
	Size	21.5" LED Panel
	Resolution	1920 x 1080 (FHD)
	Viewing Angle	88° /88° (H), 85° /85° (V)
	Brightness	250 (cd/m ²)
	Support color	16.7M colors
	Contrast ratio	1000:1
	Response time	5 msec
Touchscreen	Backlight life(hrs)	30,000 hrs
	Touchscreen type	PCT Multi-touch touchscreen
	Surface Hardness	≥6H
Environment	Transparency	>85%
	Operating Temperature	0 ~ 50°C(32~122° F)
	Storage Temperature	-20~60°C(-4~140° F)
Mechanical	Construction	Metal chassis with Aluminum profile
	Mounting	VESA mounting
	Dimension	528.4 x 326.2x 49.14 (mm)
	Net Weight	6.80kgs
System	I/O	VGA x 1, DVI x 1, HDMI x 1 , USB x 1 for Touch, phoenix connector x 1 for DC power in
	Power input	9~36Vdc in
	Power Consumption	20.45Watt
	EMC compliance	CE/FCC
Accessories	VGA cable x 1 , USB cable x 1 , Phoenix male connector x 1	
Optional Items	DVI cable (1.5 m) , HDMI cable (1.5 m)	

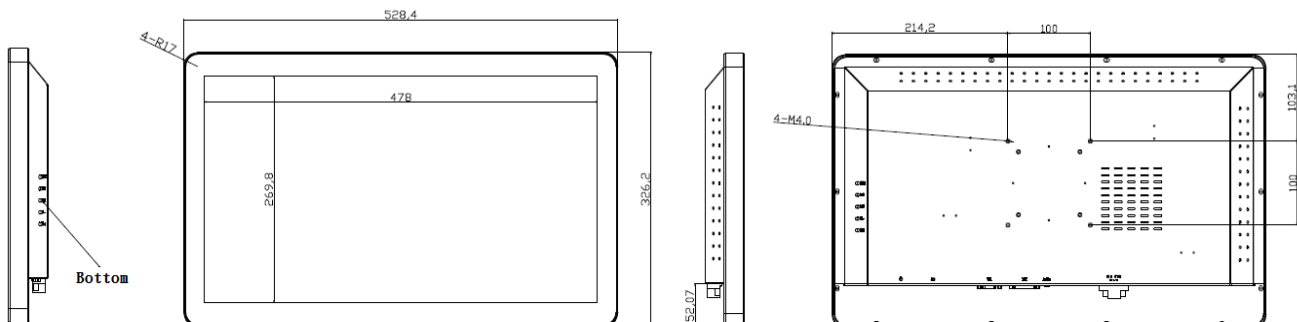

*Note: This is a simplified drawing and some components are not marked in detail. Please contact us for product detail information.