

Datasheet

2.5" SATA SSD

3TS5-P series

- 2.5" SATA III solution for industrial field
- DWPD equals to 2.0
- High IOPS with 3D NAND solution
- L³ architecture extends lifespan
- RAID Protection
- iData Guard for abnormal power failure
- Built-in thermal sensor
- iCell technology for data protection (optional)
- iSMART disk health monitoring



Introduction

3TS5-P is Innodisk's first product series supported 3D NAND flash. Innodisk 2.5" SATA SSD 3TS5-P is characterized by L³ architecture and RAID engine with the latest SATA III (6.0GHz) ID204 controller. Innodisk's exclusive L³ architecture is L² architecture multiplied LDPC (Low Density Parity Check). L² (Long Life) architecture is a 4K mapping algorithm that reduces WAF and features a real-time wear leveling algorithm to provide high performance and prolong lifespan. Innodisk 2.5" SATA SSD 3TS5-P is equipped RAID engine to offer additional level of data protection for exceptional reliability.


2.5" SATA SSD

3TS5-P series

Drawing

Contact us for more information about the 2.5" SATA SSD 3TS5-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

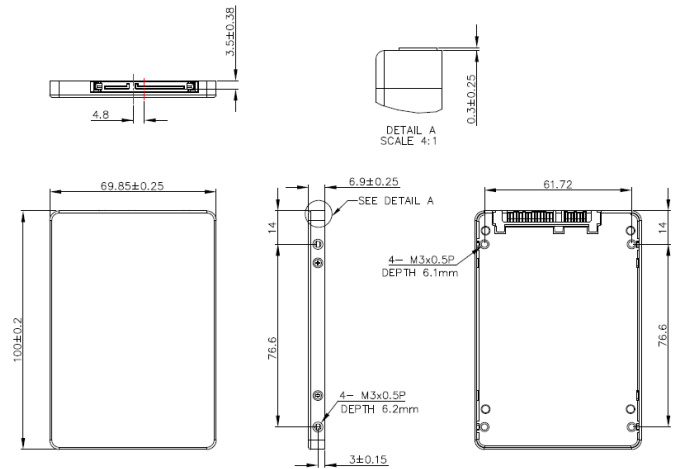

Specifications

Interface	SATA III
Flash Type	3D TLC
Flash P/E Cycle Limit	10,000
Capacity	256GB~1TB
Max. Channels	4
Sequential R/W (MB/sec, max.)	560/490
Max. Power Consumption	6.15 W (5V x 1230 mA)
Thermal Sensor	Supported
External DRAM Buffer	Supported
iCell	Supported
ATA Security	Supported
S.M.A.R.T.	Supported
Dimension (WxLxH)	69.85 X 100.10 X 6.9 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

© 2017 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

Ordering Information

20171117

Operation Temp.	256GB	512GB	1TB
Standard Grade (0°C ~ +70°C)	DSS25- B56D21ECAQH(P)	DSS25- C12D21ECAQH(P)	DSS25- 01TD21ECAQH(P)



Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



©2020 Innodisk

www.contradata.it