Datasheet

M.2 (S42) 3TG6-P series

- SATA III soultion for industrial field
- Exclusive L³ architecture
- AES-256bits encryption
- Excellent random performance
- Supports TRIM/NCQ/SMART
- Built in iData Guard
- Compatible with M.2 2242-D2-B-M standard
- Designed with hardware LDPC ECC engine



Introduction

Innodisk M.2 (S42) 3TG6-P is SATA III 6.0 Gb/s flash based disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. M.2 (S42) 3TG6-P not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

Innodisk M.2 (S42) 3TG6-P is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. In addition, Innodisk's exclusive industrial-oriented firmware provides a flexible customization service, making it perfect for a variety of industrial applications.



Distributore Autorizzato per l'Italia:


Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy Tel: (+39) 039-230.14.92 | Email: info@contradata.it



M.2 (S42) 3TG6-P series

Diagram

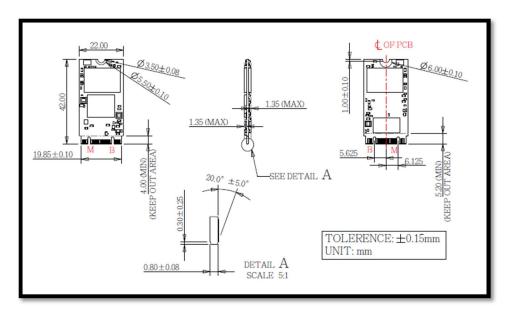

Specifications

<u> </u>			
Interface	SATA III		
Flash Type	3D TLC		
P/E cycle	3,000		
Capacity	128GB~512GB		
Max. Channels	4		
Sequential R/W (MB/sec, max.)	560/510		
Max. Power Consumption	2.44W (739mAx3.3V)		
Thermal Sensor	√		
External DRAM buffer √			
H/W Write Protect -			
ATA Security	\checkmark		
S.M.A.R.T.	√		
Dimension (WxLxH)	22.0 X 42.0 X 3.5 mm		
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours		

© 2019 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

20190225

Ordering Information

Operation Temp.	128GB	256GB	512GB
Standard Grade	DGM24-	DGM24-	DGM24-
(0°C ~ +70°C)	A28M71ECAQF	B56M71ECAQF	C12M71ECAQF
Industrial Grade	DGM24-	DGM24-	DGM24-
(-40°C ~ +85°C)	A28M71EWAQF	B56M71EWAQF	C12M71EWAQF



Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy Tel: (+39) 039-230.14.92 | Email: info@contradata.it

