


**INDUSTRIAL ETHERNET SWITCH**
**Industrial Full Gigabit 8 + 2G SFP +2G Combo DC**

# JetNet 3212G-2C2F



- ▶ 8 Gigabit Base TX ports and 2 Gigabit RJ-45/ SFP combo ports and 2 Gigabit SFP ports
- ▶ IEEE 802.1p Class of Service (CoS) for packet forwarding precedence
- ▶ 10K bytes Jumbo Frame for large file transmission
- ▶ Broadcast storm packet filtering
- ▶ Dual DC Power input 10-60V
- ▶ -40-75°C operating temperature




## Overview

The JetNet 3212G-2C2F is an industrial Switch with Din-rail design. It is equipped with 8-ports RJ-45 and 2 Gigabit SFP and 2 SFP/RJ-45 ports which provide flexible ports combination for different environment. The two Gigabit Ethernet combo ports provide high speed uplink to connect with higher level backbone switches. The JetNet 3212G-2C2F also supports Jumbo frame transmission which is crucial especially in the industrial applications requesting the transmission with large size files. The switch come with a built-in relay warning function that alerts network engineers when power failures.

The JetNet 3212G-2C2F can comply with CE and FCC standard and support wide operating temperature range of -40 to 75°C.

## Dimensions (Unit = mm)

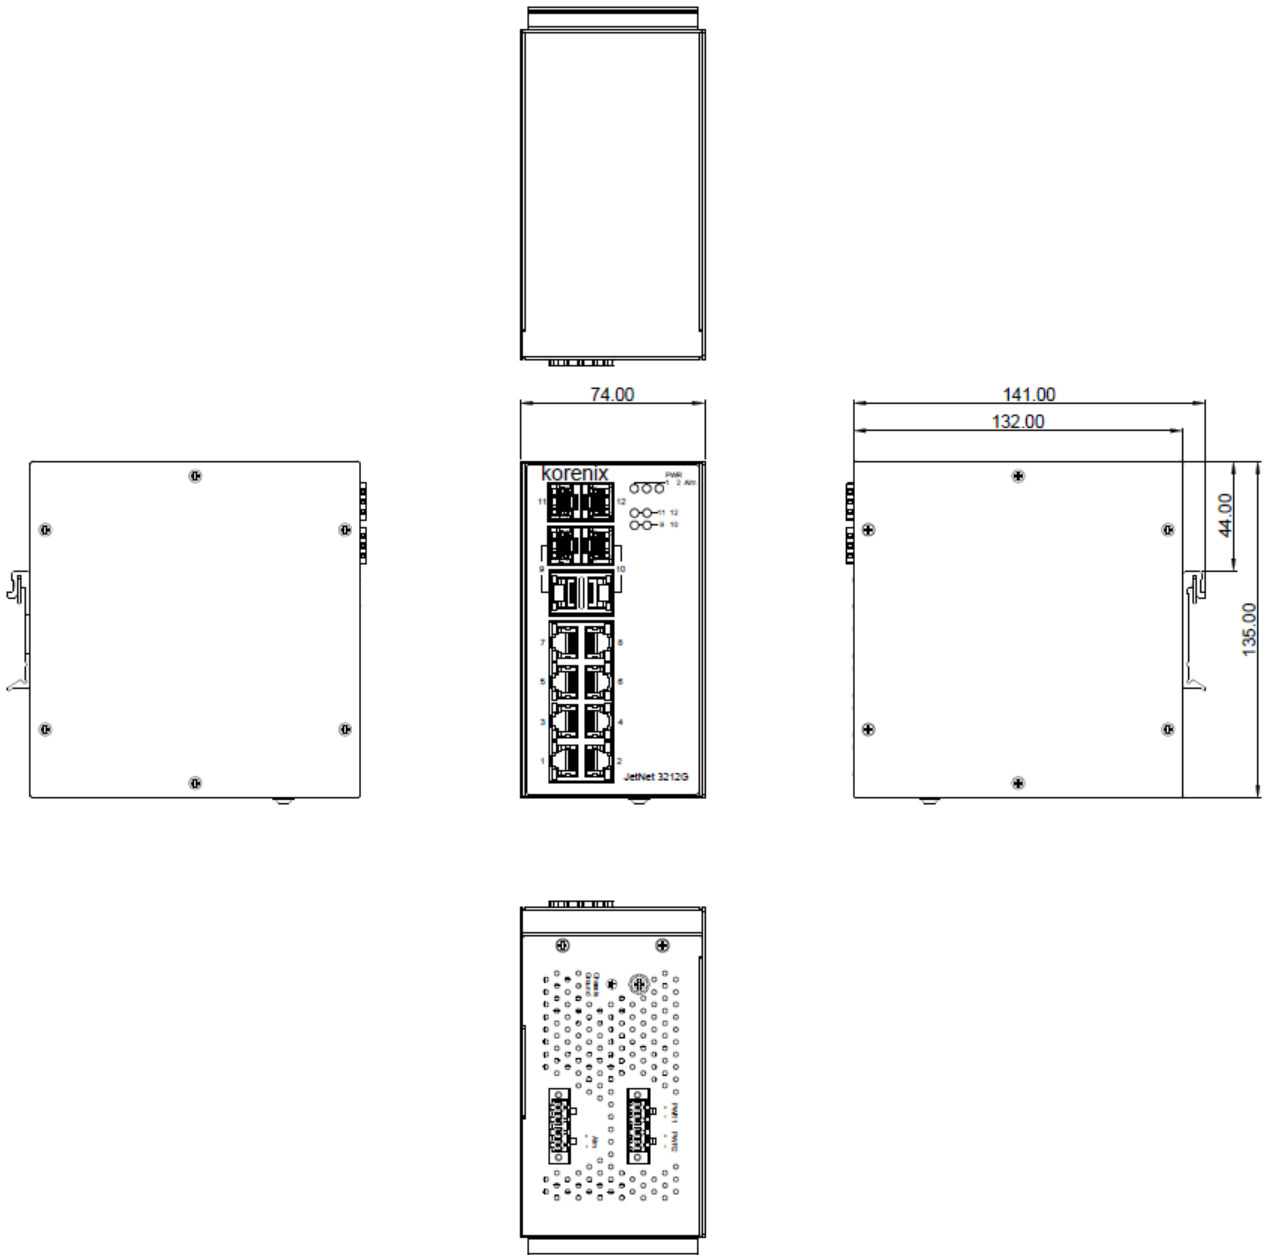

**Technology**

Standard IEEE 802.3 10Base-T Ethernet  
 IEEE 802.3u 100Base-TX Fast Ethernet  
 IEEE 802.3ab 1000Base-TX Gigabit Ethernet  
 IEEE 802.3z Gigabit Ethernet Fiber  
 IEEE 802.3Q Quality-of-Service  
 IEEE 802.3p Class of Service  
 IEEE 802.3x Flow control and back-pressure

**Network Performance**

Switch Technology Store and Forward technology with 24Gbps switch

Transfer packet size 64Bytes ~1518Bytes

MAC Address 8K MAC

Packet Buffer 4.1Mega bits

Broadcast storm control: Default enabled  
 Traffic threshold:  
 25M bps@1000Mbps;  
 10M bps@100Mbps;  
 1M bps@10 Mbps

Jumbo frame Up to 10K Bytes

Transfer performance 14,880 pps @10Mbps  
 148,800 pps @100Mbps  
 1,488,100 pps @1000Mbps

Quality of Service Compliance with IEEE802.1p class of service with Tag Based Priority rule Per switch port provides 4 priority queues with 8 (Higher): 4(High): 2(Low): 1(Lower) scheduling. The Tag Priority ID as following: Higher (6,7), High (4,5), Low (0,3), Lowest (1,2)

Class of Service Default Enabled  
 Supports IPv4/IPv6 packet priority, DSCP and ToS.  
 DSCP/ToS tag is prior to CoS tag if both exist in a frame.  
 Queue Mapping Table:

DSCP Value	Forwarding Queue	ToS Value
0-7	Low	0
8-15	Lowest	1
16-23	Lowest	2
24-31	Low	3
32-39	High	4
40-47	High	5
48-55	Highest	6
56-63	Highest	7

**Interface**

Enclosure Port 10/100/1000 Mbps Ethernet port: 10 x RJ-45 with auto MDI/MDI-X function  
 1000Mbps Fiber port : 4 x SFP Socket for SFP fiber transceiver  
 Relay Output port: 4-Pin removable terminal block connector  
 Power input port: 4-Pin removable terminal block connector

Ethernet Cable 100 Base-TX: 2-pair Cat.5E / Cat.6 FTP/STP cable, EIA/TIA 568B 100 Ohm, 100Meters  
 1000 Base-T: 4-pair Cat.5E/Cat.6 FTP/STP cable, EIA/TIA 568B 100 Ohm, 100Meters

Dry Relay Dry Relay output: 0.5A / DC 24V

LED Indicators 1000MbpsRJ-45 port: Link (Green on)/Activity (Green Blinking),Speed 1000 (Amber on)  
 1000Mps SFP: Link/Activity (Green on, Green Blinking)  
 Power: Power on (Green on)  
 Alm: Alarm(Red on)

Power Requirement	
System Power	DC 10- 60 V
Power consumption	14W

Mechanical	
Installation	DIN-Rail mounting
Case	Metal
Ingress Protection	IP31
Dimension (mm)	74 (W) x 132(D) x 135 (H) - w/o DIN Rail Clip
Installation	DIN-rail mounting
Weight	1.5Kgs

Power Requirement	
System power	2x DC power input with polarity reverse protection
Input Range	DC 10-60V

Environmental	
Operating Temperature	-40 -75°C
Operating Humidity	0% ~ 95%, non-condensing
Storage Temperature	-40 ~ 85°C, 0% -90% Humidity

Regulatory Approvals	
Railway Standard	EN 50121-4, EN50121-3-2
EMC	EMI: EN50121-3-2, FCC Class A, IEC/EN61000-6-4 EMS:EN50121-3-2/EN50121-1, IEC/EN61000-6-2 IEC/EN61000-4-2, IEC/EN61000-4-3, IEC/EN61000-4-4, IEC/EN61000-4-5, IEC/EN61000-4-6, IEC/EN61000-4-8, IEC/EN61000-4-9
Variation/Shock	IEC 61373
Free Fall	IEC 60068-2-32 with package Note-1
Warranty	5 Years

Note-1: Korenix's internal testing

## Ordering Information

Model Name	Description
JetNet 3212G-2C2F	Industrial 12-port Industrial Unmanaged switch, 8-port RJ-45, 2-port Gigabit RJ-45/SFP combo , 2-port Gigabit SFP typical Power Input DC 24V, -40-75°C  Includes: <ul style="list-style-type: none"> <li>• JetNet 3212G-2C2F</li> <li>• DIN Rail kit</li> <li>• Quick Installation Guide</li> </ul> Note: Please download User Manual from Korenix website

Distributore Korenix per l'Italia:

Contradata Milano S.r.l. | Via Solferino 12, 20900 Monza (MB) Italy  
E-mail: info@contradata.it | Web: www.contradata.it