

JETWAVE

Industrial Wireless Access Point PoE Gateway

JetWave 2714GF-WIFI Series



802.11ac



PoE
802.3at PoE



RSR Ring

Industrial Wireless Access Point + 2GT PSE + 2G SFP Gigabit PoE Switch

- 2xGigabit 802.3at PoE ports and 2x100/1000Base-X SFP fiber ports, wire-speed LAN switching
- 802.11ac 2T2R MIMO doubles up to 866Mbps per radio
- IEEE 802.3at Power Source Equipment, up to 30W per port, Link Partner Detection Protocol, Power budget control, PD Auto Reset
- Rapid Super Ring(RSR), 256 VLANs and QoS, can be integrated with our Managed Switch
- Support LAN to LTE NAT Routing, Dual SIM Redundancy, RSR Redundant Gateway, Virtual Router Redundancy Protocol(VRRP)
- NAT/Firewall/DMZ and Secure VPN Connectivity
- OPCuA for Industrial M2M Communication, SNMPv2c/v3 for NMS, LLDP, Mobile IP Management
- Dual DC54V input, -40-75°C operating temperature
- RED, EN 50121-4

Overview

The product is an industrial grade access point with multiple PoE and SFP Fiber Ethernet Ports. The product equips with 802.11ac 2T2R MIMO doubles up to 866Mbps per radio, two Gigabit 802.3at PoE Ports supports up to 30W power source to power devices.


Two 100/1000Base-X SFP Fiber port design provides great flexibility for field installation. The LAN switch ports supports wire speed switching, Rapid Super Ring (RSR), 256 VLANs, QoS traffic prioritizing and can be integrated with the industrial Managed Switch.

The product supports Cellular communication features, such as the multiple ports to LTE NAT routing, dual SIM standby, SNMP, LLDP and Mobile Manager Server for remote monitoring. The OPC UA is designed for industrial M2M communication, a popular protocol for industrial automation and M2M applications.


The product also provides different type VPN Client technology and 1-1 OpenVPN Server for secure M2M connectivity. The product supports dual 54V(50-57V)DC input, Digital Output and -40-75°C wide operating temperature.

| Model Name | 4G LTE | 3G UMTS/HSPA | WIFI | Ethernet | USB/DO /COM | SIM | Operating Temp. |
|-----------------------|--------|--------------|--------------------|------------------------------------|-------------|-----|-----------------|
| JetWave 2714GF WIFI-E | - | - | 5G/2.4G 802.11ac/n | 2xGT 802.3at PoE +2x 100/1000M SFP | 1xDO | - | -40-75°C |
| JetWave 2714GF WIFI-U | - | - | 5G/2.4G 802.11ac/n | 2xGT 802.3at PoE +2x 100/1000M SFP | 1xDO | - | -40-75°C |

Appearance

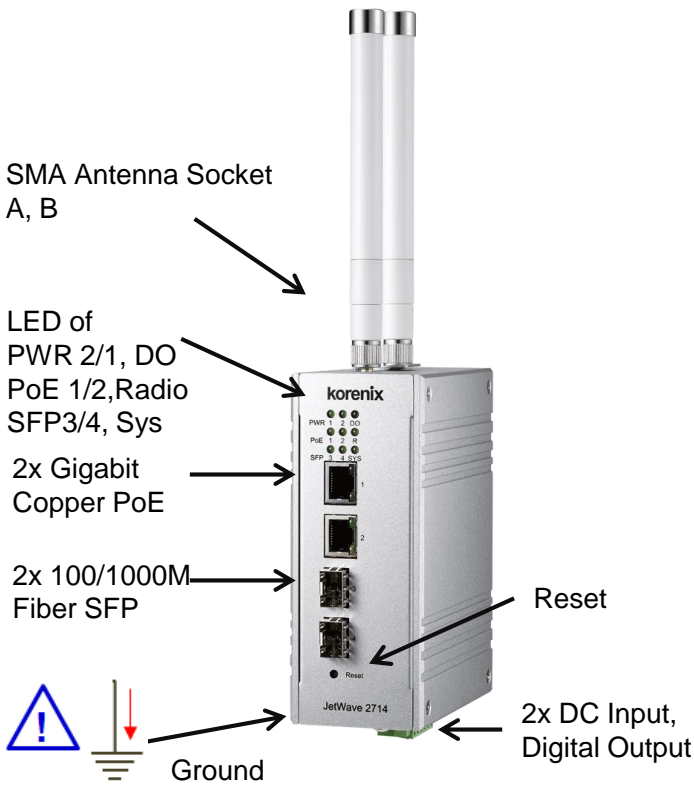

Dimension

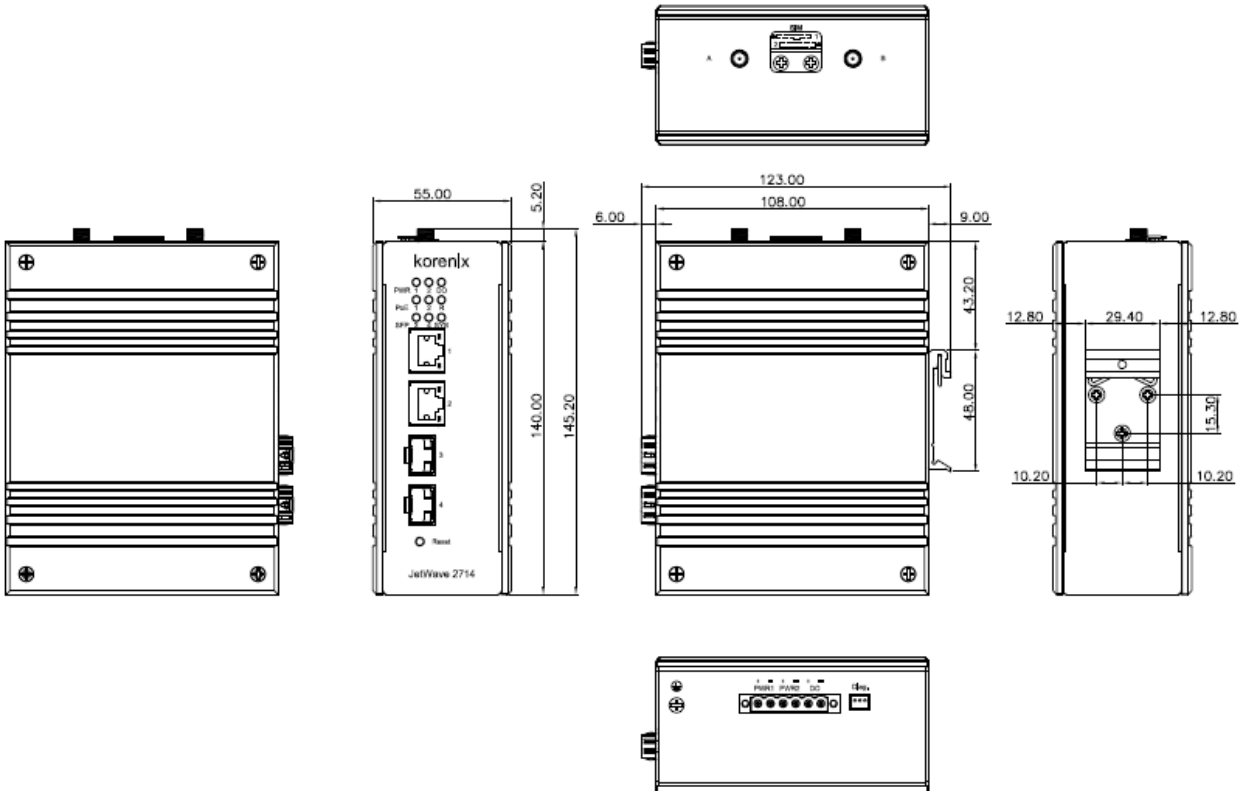

Specification

| Technology | |
|---------------------------------|---|
| Standard | IEEE 802.3 for 10BaseT, IEEE 802.3u for 10/100Base-TX, IEEE 802.3ab for 1000BaseT, IEEE 802.3z Gigabit Ethernet Fiber IEEE 802.3af 15.4W / IEEE 802.3at 30W High Power PoE+ 3GPP Release 9 Long Term Evolution (LTE), 3GPP Release 6,7,8 3G UMTS/HSDPA/HSUPA IEEE 802.1Q VLAN, IEEE802.1p Class of Service, IEEE 802.1D-2004 Rapid Spanning Tree Protocol |
| Interface | |
| Ethernet Port - RJ-45 | 2x 10/100/1000Base-T(X) RJ-45 IEEE 802.3af 15.4W / IEEE 802.3at 30W High Power PoE with 60W Total Power Budget |
| Ethernet Port - Fiber | 2x 1000Base-X/100Base-FX SFP Socket |
| Ethernet Port - Capacity | Switching: Store and Forward or Cut-Throughput Non-blocking Switching Performance, 1Mbit on-chip memory. Throughput: 14,880pps for 10M, 148,800pps for 100M, 1,488,100pps for Gigabit Ethernet Port Packet Size: Typical 64-1522 bytes and up to 10K Jumbo frame MAC Table: 8K MAC Address table with automatic learning and aging |
| Console | 3-pin Diag. socket |
| Wireless | WiFi: Dual Band 5G 802.11ac/2.4G 802.11n 2T2R MIMO *See below detail Radio specification |
| Power Input / Output | 6-pin socket for Dual DC Input (4-pin), PSE Mode A: 1, 2, 3, 6(A) and DO (2-pin) output Dual 50-57VDC Input for 802.3at PoE+ / Dual 44-57VDC Input for 802.3af PoE |
| Relay Output | 1xRelay Output, 1A@24VDC for LAN/Power Failure |
| Reset | Reset Switch, Reset to Default over 7 seconds |
| LED | System: PWR, Radio 1, DO, POE Ethernet Copper Port Link/Speed LED, Ethernet Fiber Link/Act LED |
| SMA Antenna Socket | 2x SMA Female Reverse for LTE 2T2R MIMO Nylok pre-applied; A: LTE-Main, B: LTE-Aux |
| WIFI | |
| Standard | 5G 802.11ac/2.4G 802.11n Software Selectable |
| Operating Frequency | FCC : 2.412-2.462GHz, 5.180 ~ 5.240GHz, 5.725-5.825 GHz CE : 2.412-2.472GHz, 5.180 ~ 5.240GHz, 5.500 ~ 5.700 GHz (Programmable for different country regulations) |
| MIMO | 2T2R |
| RF Modulation | 802.11g/n: OFDM (BPSK,QPSK,16QAM,64QAM, 256QAM) |
| RF Output Power | 2.4G 11n 20/40MHz: up to 21dBm; 5G 11ac/n 20/40/80MHz: up to 19dBm <20dB EIRP for CE (ETSI 300 328, include 4.6/3.5dBi default antenna) |
| RF Sensitivity | 2.4G 11n 20/40MHz: -70--94dB, 5G 11ac/n 20/40/80MHz: -60--90dB (Check User Manual) |
| Attached Antenna | 5G 4.6dBi/2.4G 3.5dBi omin-direction, -40-85°C temperature, RP SMA Plug, White Color |

| Management | |
|------------------------------|---|
| Management | Web GUI, Telnet, SNMP, IP Setup, Management VLAN ID, Configuration Backup/Restore, Firmware Upgrade, Reload Default, Ping, DO Events, DO Alarms, SNTP, Cellular Time |
| WLAN Setup (WIFI Model Only) | Multiple SSID, Radio on/off, SSID Broadcast, Frequency selection, VLAN ID, Advanced Settings, Traffic Shaping, Link Fault Pass-Through(Link Integration) |
| Router/Gateway | NAT Routing, DHCP Server/Client |
| L2 Switch | IEEE 802.1Q VLAN, max. 256 VLANs, Quality of Service for traffic prioritizing, Link Layer Discovery Protocol, IGMP Snooping, Port Security |
| PoE Control | Port/System Budget control, operation mode, PoE Scheduling, Link Partner Link Detect |
| Redundancy | Rapid Super Ring (RSR), RSR Redundant Gateway, Virtual Router Redundancy Protocol (VRRP), Rapid Spanning Tree Protocol |
| SNMP | Simple Network Management Protocol v1/v2c/v3, Function-based MIB, SNMP Trap |
| Status & Log | System Information, ARP Table, DHCP Client List, System Event Log |
| OPCuA | OPCuA for Industrial M2M communication |
| Utility/NMS | Korenix View, Korenix Mobile Manager, Network Management System (Web Download) |
| Security | |
| Secured Access | HTTPS, SSH, TACACS+, IEEE 802.1X, Radius Server |
| Firewall | Firewall Setting, DMZ, Port forwarding |
| VPN | IPSec, OpenVPN |
| Power Requirement | |
| Power | Dual DC54V (50-57VDC) input for 802.3at PoE |
| Power Consumption | Standby Mode: 6W (Power on only) Full Load: Max. 66 Watts *Suggest to reserve 15% tolerance power in practical installation. |
| Mechanical | |
| Enclosure | Aluminum housing |
| External Antenna | 2x Reverse SMA Female connector, Nylok anti-loosen paste |
| Mounting | Din-Rail |
| Dimension | 140 mm(H) x 115 mm(D) x 55mm(W) |
| Weight | 975g with package |
| Environmental | |
| Operating Temp./ Humidity | -40 - 75°C / 5% - 95% |
| Storage Temperature | -40 - 85 °C |
| Approvals | |
| Certification | RED: CE EN55022/55024 EN 61000-6-2/4 Industrial Environment EN 301 489-1/17/52 EN 301893 V2.1.1, EN 300 328 V2.1.1 EN50385/EN62311 MPE assessment Safety EN60950-1 FCC Part 15C/15E,SSA-JW1223 |
| Warranty | 5 years |
| Ordering Information | |
| JetWave 2714GF WIFI-E | Industrial 802.11ac WIFI + 2GT PSE+ + 2G SFP Wireless PoE Gateway, 5G 11ac/2.4G 11n |
| JetWave 2714GF WIFI-U | Industrial 802.11ac WIFI + 2GT PSE + 2G SFP Wireless PoE Gateway, 5G 11ac/2.4G 11n |
| Includes | Product Unit, Quick Installation Guide, Safety Instruction Default Antennas: 2xWIFI(White Color) *Please download user manual, View/Mobile Manager utility from Korenix Web Site |

Distributore Korenix per l'Italia:

Contradata Milano S.r.l. | Via Solferino 12, 20900 Monza (MB) Italy
E-mail: info@contradata.it | Web: www.contradata.it