


PAC-400G

5-slot Half-size Compact Chassis



7G000-ST1110L-RS
SATA removable drive

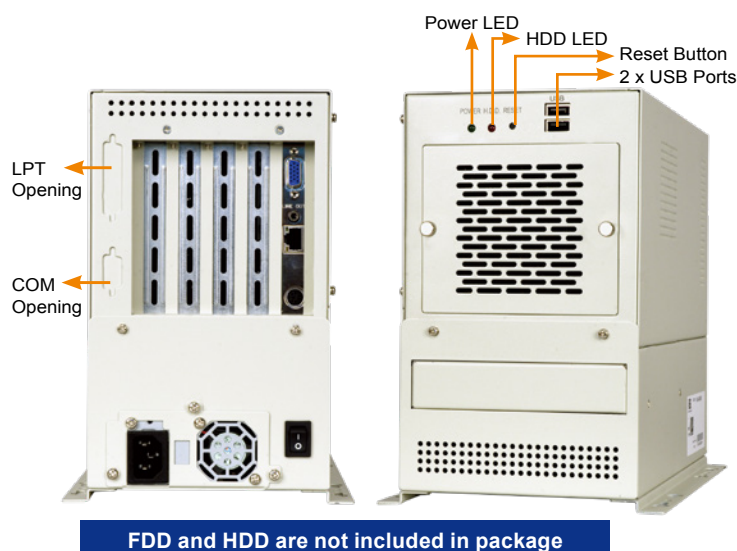

3.5" SATA removable drive bay compatible


Features

- RoHS compliant design
- Two USB ports on the front panel
- One 8 cm hot swappable fan
- One 3.5" internal HDD bay
- One 3.5" drive bay, for optional removable drive
- Supports Pentium® 4 half-size CPU card

Specifications

| | |
|-------------------------|---------------------------|
| ◆ Construction | Heavy duty metal |
| ◆ SBC Form Factor | Half-size, slot SBC |
| ◆ Drive Bays | 1 x 3.5" HDD |
| ◆ Cooling Fans | 1 x 8 cm |
| ◆ I/O Ports | 2 x USB |
| ◆ I/O Openings | 1 x LPT, 1 x COM |
| ◆ Expansion Slots | 5 slots |
| ◆ Indicators | Power, HDD |
| ◆ Button | Power switch, reset |
| ◆ Operating Temperature | 0°C ~ 50°C |
| ◆ Operating Humidity | 10% ~ 90% |
| ◆ Color | W: White |
| ◆ Weight (Net/Gross) | 3.8 kg/5.6 kg |
| ◆ Dimensions (DxWxH) | 269 mm x 140 mm x 230.5mm |

Dimensions (Unit: mm)

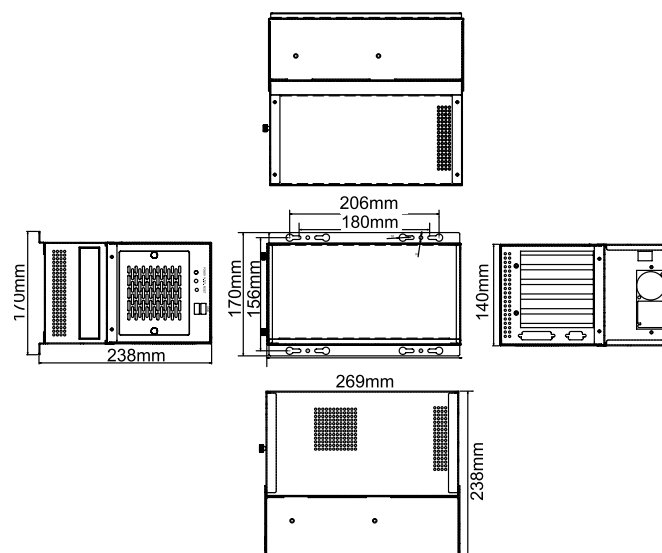

Backplane Options

| Model No. | SBC Type | PCI | ISA | PCIe | | | PSU Connector |
|------------|-----------|-----|-----|------|----|-----|---------------|
| | | | | x1 | x4 | x16 | |
| BP-4S-RS | ISA | 0 | 4 | 0 | 0 | 0 | AT |
| IP-4S-RS | PCISA | 3 | 0 | 0 | 0 | 0 | AT |
| IP-4S2-RS | PCISA | 2 | 1 | 0 | 0 | 0 | AT |
| IP-4S2A-RS | PCISA | 3 | 0 | 0 | 0 | 0 | ATX |
| HPE-4S1 | PCI/PICoE | 3 | 0 | 0 | 0 | 0 | ATX |
| HPE-4S2 | PCI/PICoE | 2 | 0 | 0 | 1 | 0 | ATX |

Ordering Information

| Part No. | Description |
|---------------------|---|
| PAC-400GW-R11/A618C | 5-Slot Half-size Industrial Chassis, White, 1x 8cm fan, with ACE-A618C-RS-R10(180W), RoHS |
| 7G000-ST1110L-RS | 3.5" SATA removable drive bay with keylock, white, RoHS |

Power Supply Options

| Type | Model No. | Watt |
|------|------------------|------|
| ATX | ACE-A618C-RS-R10 | 180W |

PAC-400G supports single 1U height PSU. For more IEI PSU models, please refer to section 5 or visit www.ieiworld.com.