

# EMBEDDED QSEVEN


## conga-QA7



- Qseven module based on Intel® Atom® x6000E Series and Intel® Pentium® and Celeron® J and N Series processors
- High performance Intel® UHD Graphics (Gen11 LP)
- Options for Industrial Temperature Range -40°C to 85°C
- Options for Time Sensitive Networking and Time Coordinated Computing for improved Realtime Capability
- Up to 4.267 MT/s Memory Support

<b>Form Factor</b>	Qseven Form Factor   Qseven Spec. Rev. 2.1 compliant   70 x 70 mm					
<b>CPU</b>	Processor	TDP	Cores/Threads	Base Frequ./Turbo	Gen 11 Gfx	Intel Use Condition
	J6413	10W	4 / 4	1.8 GHz / 3.0 GHz	16 EU	PC Client
	J6426	10W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	PC Client
	x6211E	6W	2 / 2	1.3 GHz / 3.0 GHz	16 EU	Embedded
	x6413E	9W	4 / 4	1.5 GHz / 3.0 GHz	16 EU	Embedded
	x6425E	12W	4 / 4	2.0 GHz / 3.0 GHz	32 EU	Embedded
	x6212RE	6W	2 / 2	1.2 GHz / ---	16 EU	Industrial
	x6414RE	9W	4 / 4	1.5 GHz / ---	16 EU	Industrial
	x6425RE	12W	4 / 4	1.9 GHz / ---	32 EU	Industrial
<b>DRAM</b>	max. 16GB onboard LPDDR4x   up to 4.267 MT/s					
<b>Ethernet</b>	Intel® GbE with TSN support and Out-Of-Band Management   real-time trigger					
<b>I/O Interfaces</b>	up to 2x USB 3.1 Gen2   up to 1x USB3.1 Dual Role   up to 8x USB 2.0   2x SATA III   SDIO   4x PCIe Gen3   I <sup>2</sup> C Bus   SMBus   SPI (option)   UART   CAN   LPC					
<b>Mass Storage</b>	eMMC 5.1 onboard flash up to 64 Gbyte (optional up to 256 Gbyte)					
<b>Audio</b>	Intel® HD Audio					
<b>Graphics</b>	Intel® UHD Graphics (Gen11 LP)					
<b>LVDS</b>	18/24-bit Single/Dual Channel LVDS Interface, resolutions up to 1920X1200@60Hz, VESA standard or JEIDA data mapping, Automatic Panel Detection via EDID/EPI   shared with eDP 1.3 supporting up to 4096x2160@60Hz (option) or MIPI-DSI 1.2 supporting up to 3200x2000@60Hz					
<b>Digital Display Interface</b>	Dual Mode DisplayPort 1.4 4096x2160@60Hz					
<b>congatec Board controller</b>	Multistage watchdog   non-volatile user data storage   manufacturing and board Information   board statistics   fast mode and multi-master I <sup>2</sup> C bus   power loss control					
<b>Embedded BIOS Feature</b>	AMI Aptio® UEFI firmware   32 MByte serial SPI with congatec Embedded BIOS features   OEM Logo   OEM CMOS Defaults   LCD Control   Display Auto Detection   Backlight Control   Flash Update					
<b>Power Management</b>	ACPI 5.0 compliant   Smart Battery Management					
<b>Operating Systems</b>	Microsoft® Windows 10   Microsoft® Windows 10 IoT Enterprise   Linux (Yocto Project)   Android   RTS Hypervisor					
<b>Power Consumption</b>	Typ. Application: see manual for full details					
<b>Temperature Range</b>	Commercial: Operating Temperature: 0 to +60°C		Storage Temperature: -20 to +80°C			
	Industrial: Operating Temperature: -40 to +85°C		Storage Temperature: -40 to +85°C			
<b>Humidity</b>	Operating Humidity: 10 to 90% r. H. non cond. Storage Humidity: 5 to 95% r. H. non cond.					
<b>Size</b>	70 x 70 mm (approx. 2.75" x 2.75")					

# conga-QA7 | Block Diagram

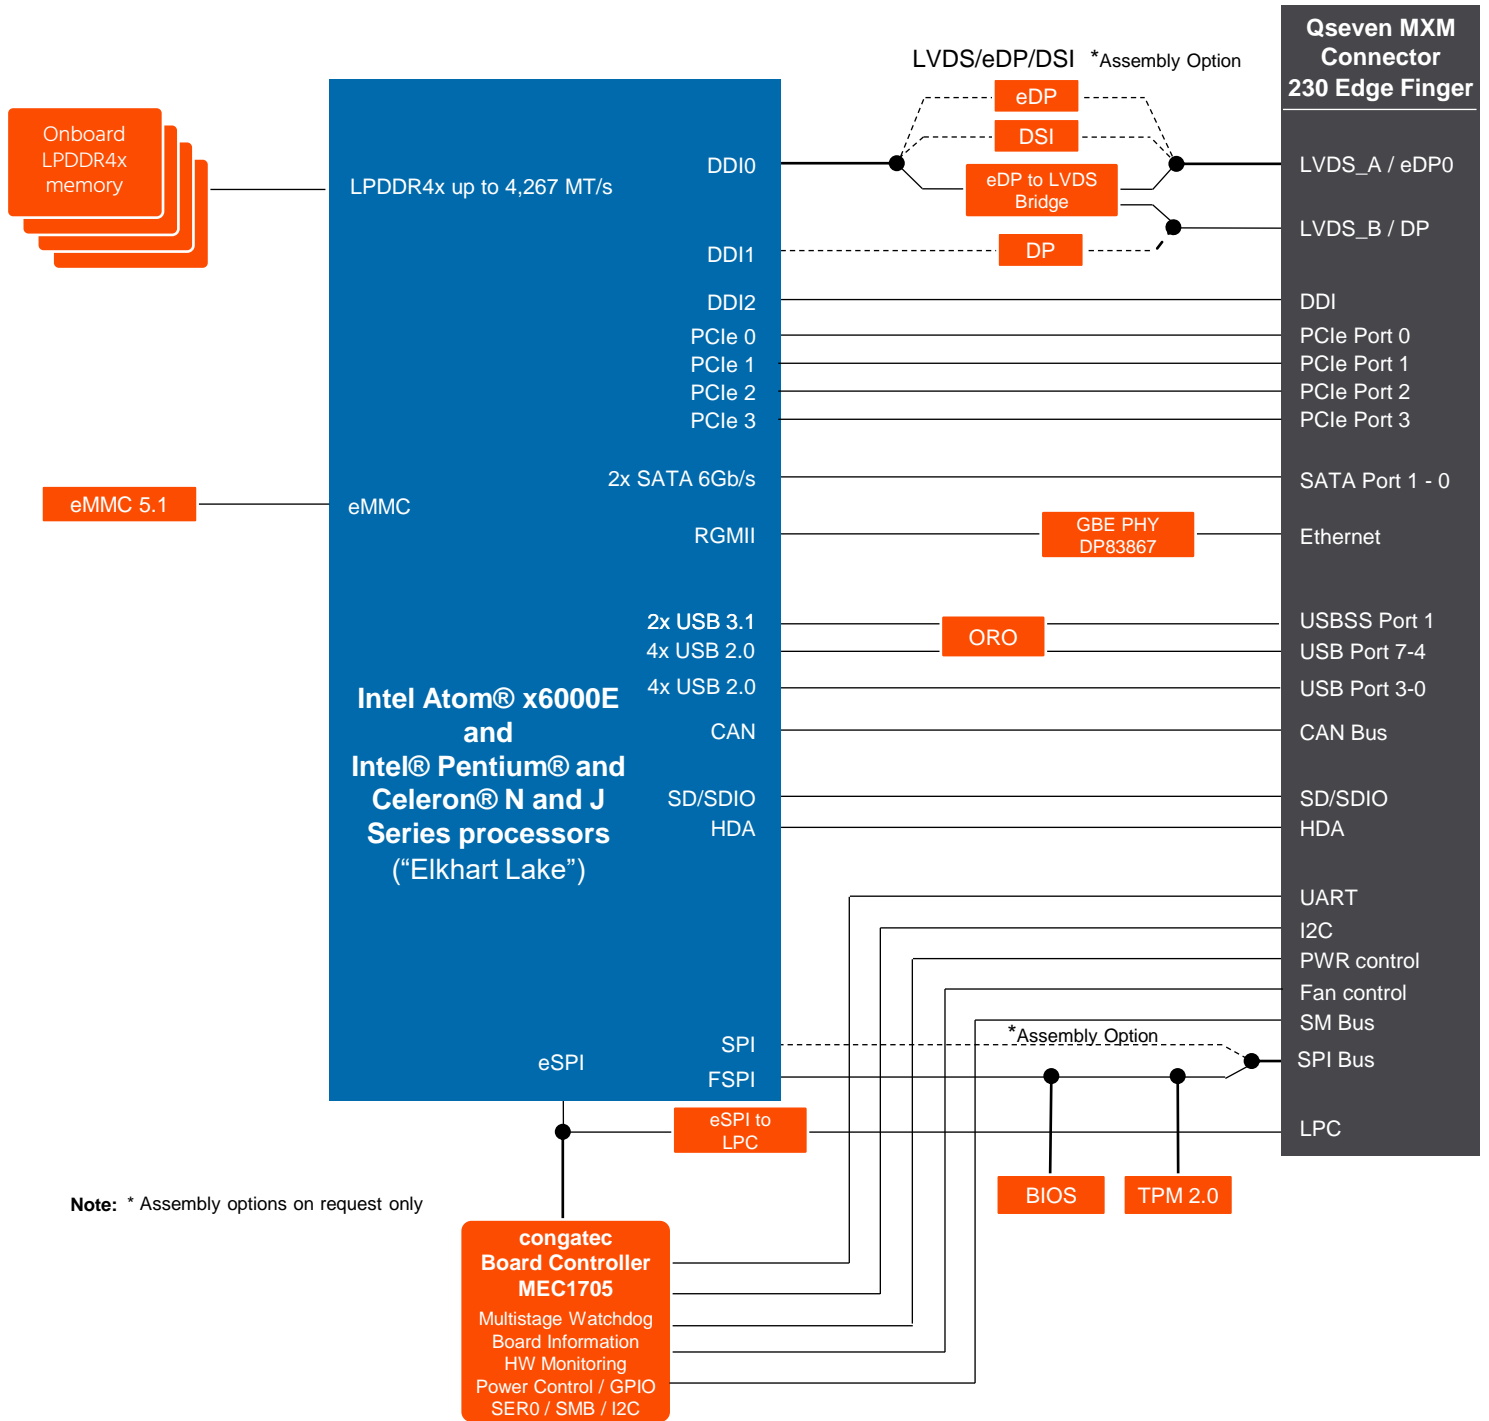

# conga-QA7 | Order Information

Article	PN	Description
conga-QA7/x6425E-16G eMMC64	015800	Qseven module with Intel Atom® x6425E quad core processor with 2.0GHz core frequency up to 3.0GHz, 1.5MB cache, 16GB 3200MT/s LPDDR4x onboard memory and 64GB eMMC 5.1 onboard flash.
conga-QA7/x6413E-8G eMMC32	015801	Qseven module with Intel Atom® x6413E quad core processor with 1.5GHz core frequency up to 3.0GHz, 1.5MB cache, 8GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-QA7/x6211E-4G eMMC32	015802	Qseven module with Intel Atom® x6211E dual core processor with 1.3GHz core frequency up to 3.0GHz, 1.5MB cache, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-QA7/i-x6425RE-8G eMMC32	015810	Qseven module with Intel Atom® x6425RE quad core processor with 1.9GHz core frequency, 1.5MB cache, 8GB 4267MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-QA7/i-x6414RE-4G eMMC32	015811	Qseven module with Intel Atom® x6414RE quad core processor with 1.5GHz core frequency, 1.5MB cache, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-QA7/i-x6212RE-4G eMMC32	015812	Qseven module with Intel Atom® x6212RE dual core processor with 1.2GHz core frequency, 1.5MB cache, 4GB 3.200MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash. Industrial grade temperature range from -40°C to 85°C.
conga-QA7/J6426-16G eMMC64	015820	Qseven module with Intel® Pentium® J6426 quad core processor with 2.0GHz core frequency up to 3.0GHz, 1.5MB cache, 16GB 3200MT/s LPDDR4x onboard memory and 64GB eMMC 5.1 onboard flash.
conga-QA7/J6413-8G eMMC32	015821	Qseven module with Intel® Celeron® J6413 quad core processor with 1.8GHz core frequency up to 3.0GHz, 1.5MB cache, 8GB 3.733MT/s LPDDR4x onboard memory and 32GB eMMC 5.1 onboard flash.
conga-QA7/i-CSP-B	015850	Passive cooling solution for Qseven module conga-QA7 with lidded Intel Atom® x6000E processors. All standoff are with 2.7mm bore hole.
conga-QA7/i-HSP-B	015851	Standard heatspreader for Qseven module conga-QA7 with lidded Intel Atom® x6000E processors. All standoff are with 2.7mm bore hole.
conga-QA7/HSP-B	015852	Standard heatspreader for Qseven module conga-QA7 with open-die Intel® Pentium®/Celeron® J and N processors. All standoff are with 2.7mm bore hole.
conga-QA7/CSP-B	015853	Passive cooling solution for Qseven module conga-QA7 with open-die Intel® Pentium®/Celeron® J and N processors. All standoff are with 2.7mm bore hole.
conga-QA7/i-CSP-T	015854	Passive cooling solution for Qseven module conga-QA7 with lidded Intel Atom® x6000E processors. All standoff are M2.5x0.45p threaded.
conga-QA7/i-HSP-T	015855	Standard heatspreader for Qseven module conga-QA7 with lidded Intel Atom® x6000E processors. All standoff are M2.5x0.45p threaded.
conga-QA7/HSP-T	015856	Standard heatspreader for Qseven module conga-QA7 with open-die Intel Pentium/Celeron J and N processors. All standoff are M2.5x0.45p threaded.
conga-QA7/CSP-T	015857	Passive cooling solution for Qseven module conga-QA7 with open-die Intel Pentium/Celeron J and N processors. All standoff are M2.5x0.45p threaded.

© 2021 congatec GmbH.  
All rights reserved.

All data is for information purposes only. Although all the information contained within this document is carefully checked, no guarantee of correctness is implied or expressed. Product names, logos, brands, and other trademarks featured or referred are the property of their respective trademark holders. These trademark holders are not affiliated with congatec AG. Product not yet released for Mass Production.  
Preliminary Revision 1.8 – June 15<sup>th</sup>, 2021



Distributore Italia: Contradata Milano S.r.l.

Via Solferino 12 - 20900 Monza (MB) - Italy  
Tel: (+39) 039-230.14.92 Email: info@contradata.it

[www.contradata.it](http://www.contradata.it)