

# CS-W121C/M1001

## 21.5" TFT-LCD Sunlight Readable Touch Monitor



- 21.5" TFT-LCD with Ultra High Brightness up to 1,000 nits and 1920 x 1080 Resolution
- Designed with Aluminum Die-casting Front Frame
- True Flat IP65 Front Panel Protection
- Supports Panel / VESA / Rack Mounting
- Wide Range Power Input 9~48VDC
- Convertible Display System (CDS) Technology Supported



### Overview

CS-W121C/M1001 Series is a 21.5" TFT-LCD sunlight readable touch monitor offering 1,000 nits ultra high brightness and 1920 x 1080 resolution. It supports both digital and analog signal input via three types of display interface, including VGA, DVI-D and DisplayPort. CS-W121C/M1001 Series supports Convertible Display System (CDS) technology which allows you to configure, upgrade and maintain your display system according to your need. In addition, it has OSD function for adjusting the viewing options of display.

Featuring wide range operating temperature (0°C to 60°C), IP65 dust/water proof front panel and wide range DC power input (9 to 48VDC), CS-W121C/M1001 Series is a rugged and reliable display solution for outdoor applications, such as heavy-duty lifting & moving equipment, e-toll collection system, car-sharing system and outdoor kiosk.

### Specifications

#### Display

LCD Size	• 21.5" (16:9)
Max. Resolution	• 1920x1080 (Full HD)
Brightness (cd/m2)	• 1,000
Contrast Ratio	• 5,000:1
LCD Color	• 16.7M
Pixel Pitch (mm)	• 0.24825 (H) x 0.24825 (V)
Viewing Angle (H-V)	• 178 /178
Backlight MTBF	• 50,000 hrs (LED Backlight)

#### Touch

Projected Capacitive	V
----------------------	---

#### Audio

Audio	• 1x Audio Input
-------	------------------

#### External I/O Interface

VGA	• 1x VGA Input
DP	• 1x DisplayPort Input
DVI	• 1x DVI-D Input
USB	• 1x USB 2.0 (for Projected Capacitive Touch)
COM	• 1x COM Port (reserved for Resistive Touch)

#### Other Function

Internal Speaker	• AMP 5W + 5W
OSD Function	• LCD On/Off, Auto, Menu, Up and Down • Multi-language OSD Function

**Power**

Power Input	• 9 - 48VDC, 3-pin Terminal Block
Power Adapter (Optional)	• Optional AC/DC 12V/5A, 60W

**Physical**


Dimension (W x H x D)	• 550 x 330,5 x 73mm
Weight Information	• 6.68 Kg
Front Panel Construction	• Die-Casting Flat Surface
Mounting	• Panel / VESA / *Rack Mounting (*with optional mounting kit)
Physical Design	• Fanless Design

**Environment**


Operating Temperature	• Ambient with air flow: 0°C to 60°C (with Industrial Grade Peripherals)
Storage Temperature	• -20°C to 70°C
Relative Humidity	• 90% RH @ 39°C (Non-condensing)
EMC	• CE, FCC, ICES-003 Class A
IP Level	• IP65 Compliant Front Panel

**External Layout**


Front

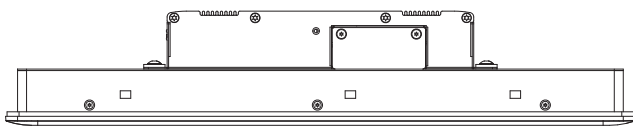


Rear

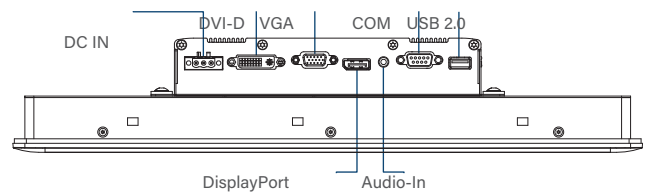


Left

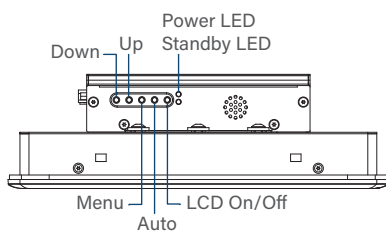

Right

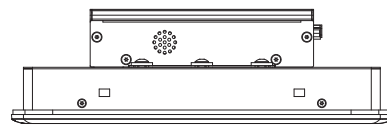

## Dimensions

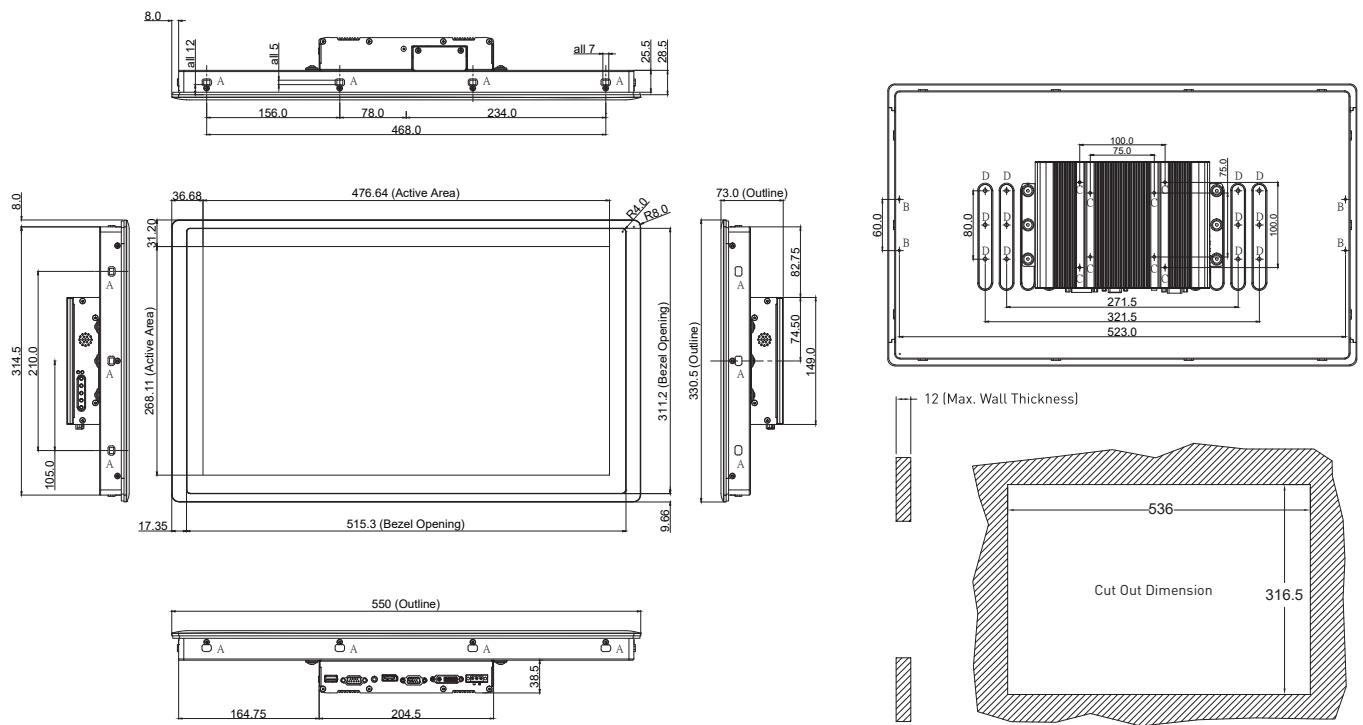

Unit: mm

## Ordering Information

### Available Models

Model No.	Description
CS-W121C-R10/M1001-R12	21.5" TFT-LCD Full HD 16:9 Display Module with Projected Capacitive Touch, 1x USB, 1x COM, 1x VGA, 1x DVI-D and 1x DisplayPort, 9V~48V

### Package Checklist

- CS-W121C/M1001 Touch Monitor x 1
- Panel Mounting Kit x 1
- Utility DVD Driver x 1
- Power Terminal Block Connector x 1
- USB Cable x 1
- VGA Cable x 1
- Screw Pack x 1

### Optional Modules

Model No.	Description
URM01	Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor

### Optional Accessories

Model No.	Description
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)



Distributore per l'Italia: **Contradata Milano S.r.l.**

Via Solferino 12 - 20900 Monza (MB) - Italy  
Tel: (+39) 039-230.14.92 Email: info@contradata.it

[www.contradata.it](http://www.contradata.it)