

Datasheet

# mSATA 3IE7 with Innodisk NAND

- SATA III solution for industrial field
- Exclusive L<sup>3</sup> architecture
- DRAM-less, 100% data integrity
- Excellent random performance
- Supports TRIM/NCQ/SMART
- Built in iData Guard
- Designed with hardware LDPC ECC engine



## Introduction

Innodisk mSATA 3IE7 is SATA III 6.0 Gb/s flash based disk, which adopts latest SATA III NAND controller with Innodisk's exclusive L<sup>3</sup> FW architecture. The upgraded L<sup>3</sup> FW architecture, combining Innodisk signature 4K mapping algorithm L<sup>2</sup> FW architecture with powerful LDPC technology, makes 3IE7 series have outstanding high IOPS, better data integrity and extended lifespan through reducing the bad block number happening. Built-in thermal sensor, and iData Guard ensure data integrity and reliability of 3IE7 for industrial applications.

Innodisk mSATA 3IE7 is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. In addition, Innodisk's exclusive industrial-oriented firmware provides a flexible customization service, making it perfect for a variety of industrial applications.


**innodisk**

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it




[www.contradata.it](http://www.contradata.it)

# mSATA 3IE7 series

## Diagram

For 80-640GB

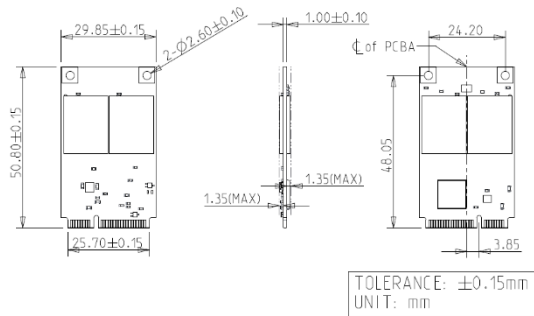

**Contact us for more information about the mSATA 3IE7.**

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

## Specifications

Interface	SATA III
Flash Type	iSLC (3D TLC)
P/E Cycle	30,000
Capacity	80GB~640GB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	550 / 520 MB/s
4KB Random (QD32) R/W (IOPS)*	87,000/71,000
Max. Power Consumption	1.3W
Thermal Sensor	√
External DRAM Buffer	-
H/W Write Protect	Optional
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	29.85 X 50.8 X 3.7 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Performance based on CystalDiskMark 6.0.2 with file size 1000MB	

© 2021 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

## Ordering Information (Please refer to TPS for detail)

Operation Temp.	80GB	160GB	320GB	640GB
Standard Grade (0°C ~ +70°C)	DHMSR-80GDK1GCAQL	DHMSR-A60DK1GCAQL	DHMSR-D2GDK1GCAQL	DHMSR-F4GDK1GCAQL
Industrial Grade (-40°C ~ +85°C)	DHMSR-80GDK1GWAQL	DHMSR-A60DK1GWAQL	DHMSR-D2GDK1GWAQL	DHMSR-F4GDK1GWAQL

**innodisk**

**Distributore Autorizzato per l'Italia:**

**Contradata Milano S.r.l.**

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



[www.contradata.it](http://www.contradata.it)