


Datasheet

M.2 (S80) 3SE2-P AES series

- SATA III solution for industrial field
- Hardware-based AES 256bits key
- Compliant with TCG OPAL 2.0
- Complaint with IEEE 1667
- Intelligent error recovery system
- Excellent data transfer speed
- iSMART disk health monitoring

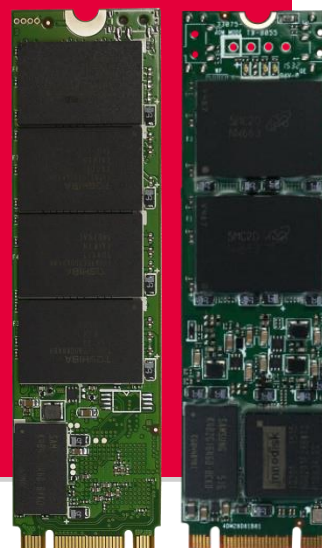

Introduction

Innodisk M.2 (S80) 3SE2-P is designed as the standard M.2 form factor with SATA interface, and supports SATA III standard (6.0Gb/s) with excellent performance. The form factor refers to the M.2(NGFF) specification which established by JEDEC. Regarding of mechanical interference, Innodisk M.2 (S80) 3SE2-P absolutely replaces the traditional hard disk and makes personal computer, in any field, smaller and easier.

Innodisk M.2 (S80) 3SE2-P effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD), and complies with ATA protocol, no additional drives are required, and can be configured as a boot device or data storage device. Innodisk M.2 (S80) 3SE2-P is designed with AES engine, which is built-in the controller. When controller receives the data package from host, AES engine encrypts the data package and saves the encrypted data into NAND flash. Thus, unauthorized personal has no access to decrypt the data in NAND flash.


innodisk

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



www.contradata.it

M.2 (S80) 3SE2-P AES series

**Contact us for more information
about the M2 (S80) 3SE2-P.**

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Specifications

Interface	SATA III
Flash Type	SLC
Capacity	8GB~256GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	520 / 340 (MB/s)
Max. Power Consumption	2.2W (3.3V x 0.67A)
Thermal Sensor	✓
External DRAM buffer	✓
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	22.0 X 80.0 X 3.5 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

20200331

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DEM28-08GD82SCADB	DEM28-16GD82SCAQB	DEM28-32GD82SCAQB	DEM28-64GD82SCAQB	DEM28-A28D82SCAQB	DEM28-B56D82SCAQB
Industrial Grade (-40°C ~ +85°C)	DEM28-08GD82SWADB	DEM28-16GD82SWAQB	DEM28-32GD82SWAQB	DEM28-64GD82SWAQB	DEM28-A28D82SWAQB	DEM28-B56D82SWAQB


innodisk

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy


Tel: (+39) 039-230.14.92 | Email: info@contradata.it




www.contradata.it

Diagram

8GB-128GB

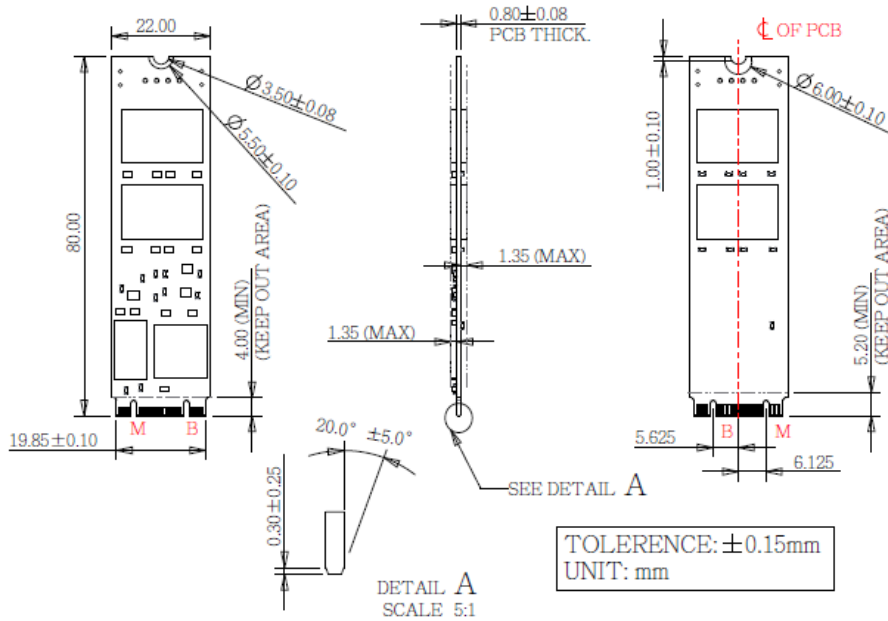

256GB

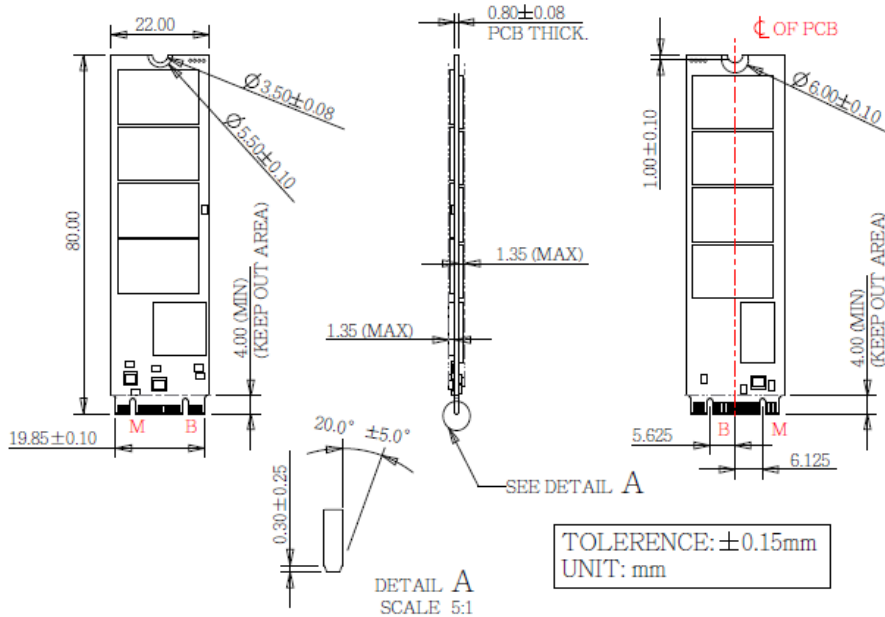

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



www.contradata.it