

Datasheet

M.2 (S80) 3TG6-P series

- SATA III solution for industrial field
- High IOPS
- AES-256bits encryption
- Excellent random performance
- End to end data path protection
- iData Guard for abnormal power failure
- Compatible with M.2 2280-D2-B-M standard



Introduction

Innodisk M.2 (S80) 3TG6-P is SATA III 6Gb/s solid state disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. M.2 (S80) 3TG6-P not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.

Innodisk M.2 (S80) 3TG6-P is designed for industrial field, and supports several standard features, including TRIM, NCQ, and S.M.A.R.T. In addition, Innodisk's exclusive industrial-oriented firmware provides a flexible customization service, making it perfect for a variety of industrial applications.


innodisk

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



www.contradata.it


M.2 (S80)

3TG6-P series

Diagram

Contact us for more information about the M.2 (S80) 3TG6-P.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

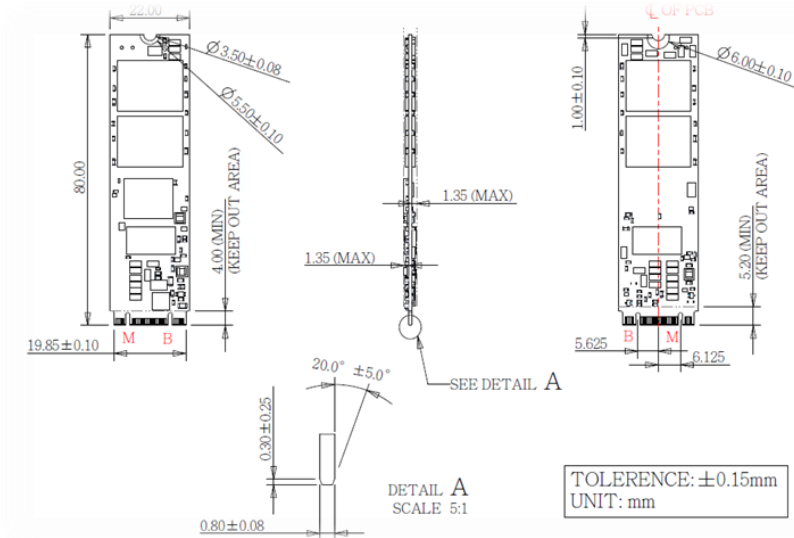

Specifications

Interface	SATA III
Flash Type	3D TLC
P/E cycle	3,000
Capacity	128GB~2TB
Max. Channels	4
Sequential R/W (MB/sec, max.)	560/510
Max. Power Consumption	2.9W
Thermal Sensor	✓
External DRAM buffer	✓
H/W Write Protect	Optional
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	22.0 X 80.0 X 3.8mm (Max)
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

© 2020 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

20210727

Order Information

Operation Temp.	128GB	256GB	512GB	1TB	2TB
Standard Grade (0°C ~ +70°C)	DGM28-A28M72EC**QF	DGM28-B56M72*C**QF	DGM28-C12M72*C**QF	DGM28-01TM72*C**QF	DGM28-02TM72GC**QF
Industrial Grade (-40°C ~ +85°C)	DGM28-A28M72EW**QF	DGM28-B56M72*W**QF	DGM28-C12M72*W**QF	DGM28-01TM72*W**QF	DGM28-02TM72GW**QF

*.E=64 Layers TLC/G=96 Layers TLC

** .A/B=BGA / 1=TSOP

innodisk

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



www.contradata.it