

Datasheet

M.2 (P80) 3TG3-P series

- PCIe Gen. III x4, NVMe 1.3
- Excellent data transfer speed
- Heat-spreading design
- LDPC ECC engine supported.
- End-to-end Data Path Protection



Introduction

Innodisk M.2 (P80) 3TG3-P is an NVM Express SSD designed as the standard M.2 form factor with PCIe interface and 3D TLC NAND Flash. M.2 (P80)3TG3-P supports PCIe Gen III x4, and it is compliant with NVMe 1.3 providing excellent performance. M.2 (P80) 3TG3-P with heat-spreading design dissipate heat generating from IC making SSD perform more stably. With sophisticated error detection and correction (ECC) functions, the module can ensure full End-to-end Data Path Protection that secures the data transmission between host system and NAND Flash.

Innodisk M.2 (P80) 3TG3-P provides ultra-speed and high IOPS and offers maximum capacity up to 2TB, making the SSD optimal for server and heavy data workload applications.


innodisk

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it




www.contradata.it

M.2 (P80) 3TG3-P series

Contact us for more information about the M.2 (P80) 3TG3-P.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Diagram (ST)

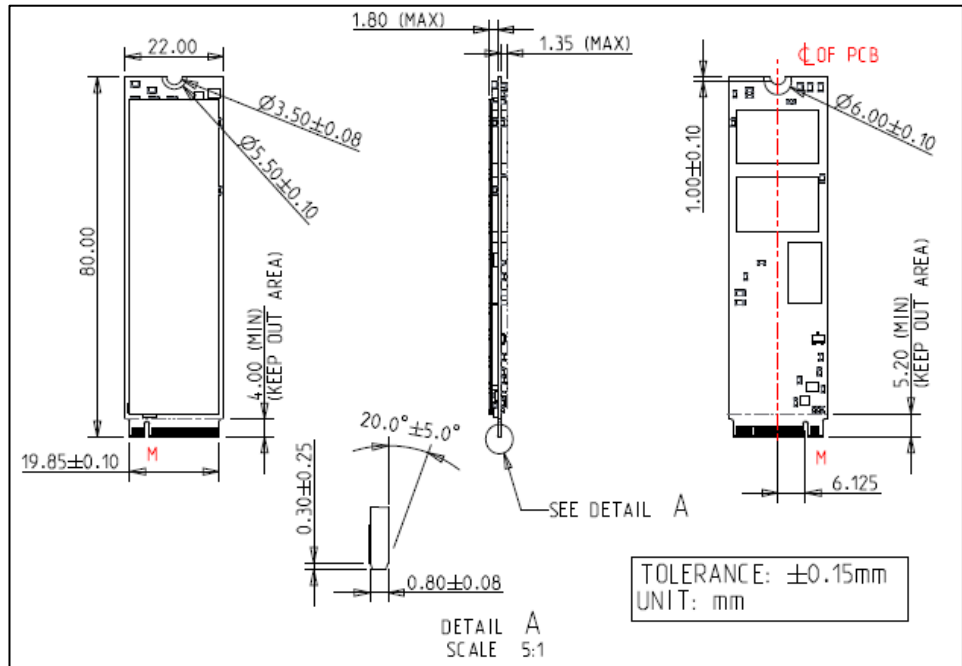

© 2020 Innodisk Corporation.
All right reserved. Specifications are subject to change without prior notice.

20201103

Interface	PCIe Gen. III x4
Flash Type	3D TLC
P/E cycle	3,000
Capacity	256GB~2TB
Max. Channels	8
Sequential R/W (MB/sec, max.)	3100/2400
Max. Power Consumption	5.94W(3.3 x 1.8A)
Thermal Sensor	√
External DRAM buffer	√
H/W Write Protect	NA
iCell	NA
Dimension (WxLxH)	22.0 X 80.0 X 3.5 mm; 22.0 X 80.0 X 3.95 mm with heat-spreading copper layer
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Working Temperature: 0°C ~ +70°C MTBF: 3 million hours

Ordering Information

Operation Temp.	256GB	512GB	1TB	2TB
Standard Grade (0°C ~ +70°C)	DGM28- B56DA1GCAQF	DGM28- C12DA1GCAEF	DGM28- 01TDA1GCAEF	DGM28- 02TDA1GCAEF

innodisk

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



www.contradata.it