

CS-W124C/P1001

24" TFT-LCD Sunlight Readable Touch Panel PC with Intel® Atom™ E3845 Quad Core Processor



- 24" TFT-LCD with Ultra High Brightness up to 1,500 nits and 1920 x 1080 Resolution
- Onboard Intel® Atom™ E3845 Processor
- Designed with Aluminum Die-casting Front Frame
- True Flat IP65 Front Panel Protection
- Supports Panel / VESA / Rack Mounting
- Convertible Display System (CDS) Technology Supported



Overview

CS-W124C/P1000 Series is a 24" TFT-LCD sunlight readable touch panel PC offering 1,500 nits ultra high brightness and 1920 x 1080 resolution. The system is equipped with Intel® Atom® E3845 processor and provides extensive I/O including 2x GbE, 4x USB, 2x RS232/422/485, 4x DI/4x DO, 1x VGA and 1x Display-Port. It also supports 1x Mini-PCIe slot and 1x SIM socket for a variety of wireless connections, such as BT/WiFi and 3G/LTE. In addition, there are 2 types of storage devices including 2.5" SATA HDD and CFast. The accessible design of these storage devices allows quick data access and easy maintenance.

CS-W124C/P1000 Series supports Convertible Display System (CDS) technology. Comparing to regular standalone panel PCs, it can lower maintenance cost and reduce unplanned downtime.

Furthermore, CS-W124C/P1000 Series is a truly rugged display system supporting wide range operating temperature (-20°C to 70°C), IP65 dust/water proof front panel, wide range DC power input (9 to 48VDC) and rigorous industrial protections.

Specifications

Display

LCD Size	• 24" (16:9)
Max. Resolution	• 1920x1080 (Full HD)
Brightness (cd/m2)	• 1,500
Contrast Ratio	• 5,000:1
LCD Color	• 16.7M
Pixel Pitch (mm)	• 0.27675 (H) x 0.27675 (V)
Viewing Angle (H-V)	• 178 /178
Backlight MTBF	• 50,000 hrs (LED Backlight)

Touch

Projected Capacitive	V
----------------------	---

System

Processor	• Onboard Intel® Atom™ Processor E3845 Quad Core, 1.91 GHz with AMI 64Mbit SPI BIOS
Memory	• 1x DDR3 1066/1333 MHz SO-DIMM Sockets • Supports Un-buffered and Non-ECC Type Up to 8 GB

Graphics

Graphics Engine	• Integrated Intel® HD Graphics
Maximum Display Output	• Supports Dual Display - VGA + DP - VGA + CDS - DP + CDS

Audio

Audio Codec	• Realtek ALC888-GR
Line-out	• 1x Speaker-out Phone Jack 3.5mm
Mic-in	• 1x Mic-in, Phone Jack 3.5mm

External I/O Interface

VGA	<ul style="list-style-type: none"> • 1x DB-15 connector, CH7517, Up to 1920x1080@60Hz
DP	<ul style="list-style-type: none"> • 1x DisplayPort Connector (2560 x 1600)
LAN	<ul style="list-style-type: none"> • 2x 10/100/1000 Mbps, RJ45 - GbE1: Intel I210 - GbE2: Intel I210 Support Wake On Lan, Teaming, Jumbo frame, IEEE 1588v2, PXE
USB	<ul style="list-style-type: none"> • 1x USB 3.2 Gen1, Type-A • 3x USB 2.0, Type-A
COM	<ul style="list-style-type: none"> • 2x RS-232/422/485, DB9 Support 5V/12V
CDS	<ul style="list-style-type: none"> • Supports Convertible Display System (CDS) Technology

DIO

DIO	<ul style="list-style-type: none"> • 4x Digital Input (Source Type) <ul style="list-style-type: none"> - Input Voltage (Dry Contact): <ul style="list-style-type: none"> Logic 0: Close to GND Logic 1: Open - Input Voltage: <ul style="list-style-type: none"> Logic 0: 3V (Min/DI to COM+) • 4x Digital Output <ul style="list-style-type: none"> - Supply Voltage: 9~30VDC - Sink Current: 1A Max.
-----	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Storage

SSD/HDD	<ul style="list-style-type: none"> • 1x Internal SATA port for 2.5" HDD/SSD
CFast	<ul style="list-style-type: none"> • 1x CFast Socket

Expansion

Mini PCI Express	<ul style="list-style-type: none"> • 1x Full-size Mini PCIe Socket for Wi-Fi / GSM / Expansion Module
SIM Socket	<ul style="list-style-type: none"> • 1x SIM Socket

Other Function

Internal Speaker	<ul style="list-style-type: none"> • AMP 2W + 2W
Rest Button	<ul style="list-style-type: none"> • 1x Reset Button
Instant Reboot	<ul style="list-style-type: none"> • Supports Instant Reboot Technology (0.2 sec)
Watchdog Timer	<ul style="list-style-type: none"> • Software Programmable Supports 256 Levels System Reset
OSD Function	<ul style="list-style-type: none"> • LCD On/Off, Brightness Up, Brightness Down (With Display Module)

Power

Power Button	<ul style="list-style-type: none"> • 1x ATX Power On/Off Button
Power Mode Switch	<ul style="list-style-type: none"> • 1x AT/ATX Mode Switch
Power Input	<ul style="list-style-type: none"> • 9 - 48VDC, 3-pin Terminal Block
Power Adapter (Optional)	<ul style="list-style-type: none"> • Optional AC/DC 12V/5A, 60W

Physical

Dimension (W x D x H)	<ul style="list-style-type: none"> • 605 x 373 x 72 mm
Weight Information	<ul style="list-style-type: none"> • 7.98 Kg
Front Panel Construction	<ul style="list-style-type: none"> • Die-Casting Flat Surface
Mounting	<ul style="list-style-type: none"> • Panel / VESA / *Rack Mounting (*with optional mounting kit)
Physical Design	<ul style="list-style-type: none"> • Fanless Design

Reliability & Protection

Reverse Power Input Protection	<ul style="list-style-type: none"> • Yes
Over Voltage Protection	<ul style="list-style-type: none"> • Protection Range: 51~58V • Protection Type: shut down operating voltage, re-power on at the preset level to recover
Over Current Protection	<ul style="list-style-type: none"> • 20A
ESD Protection	<ul style="list-style-type: none"> • +/-8kV (air), +/-4kV (contact)

Operating System


Windows	<ul style="list-style-type: none"> • Windows® 10 • Windows® 8.1 • Windows® 7
Linux	<ul style="list-style-type: none"> • Support by Project

Environment


Operating Temperature	<ul style="list-style-type: none"> • Ambient with air flow: -20°C to 70°C (with Industrial Grade Peripherals)
Storage Temperature	<ul style="list-style-type: none"> • -20°C to 70°C
Relative Humidity	<ul style="list-style-type: none"> • 80% RH @ 50°C (Non-condensing)
EMC	<ul style="list-style-type: none"> • CE, FCC, ICES-003 Class A
IP Level	<ul style="list-style-type: none"> • IP65 Compliant Front Panel

External Layout


Front

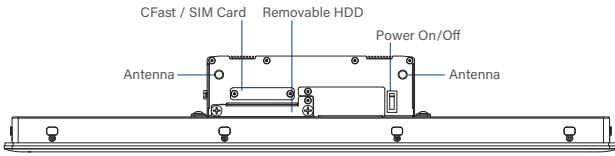


Rear

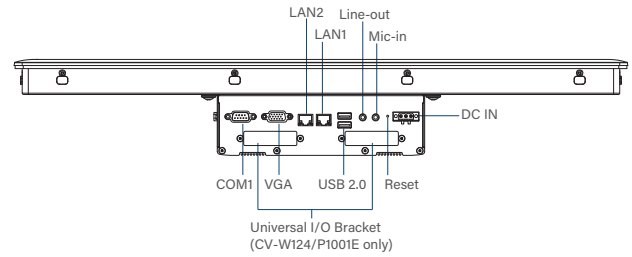


Left

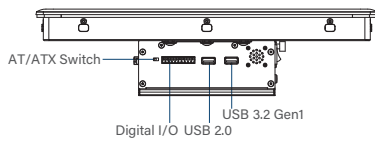

Right

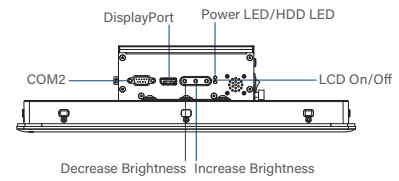

Dimensions

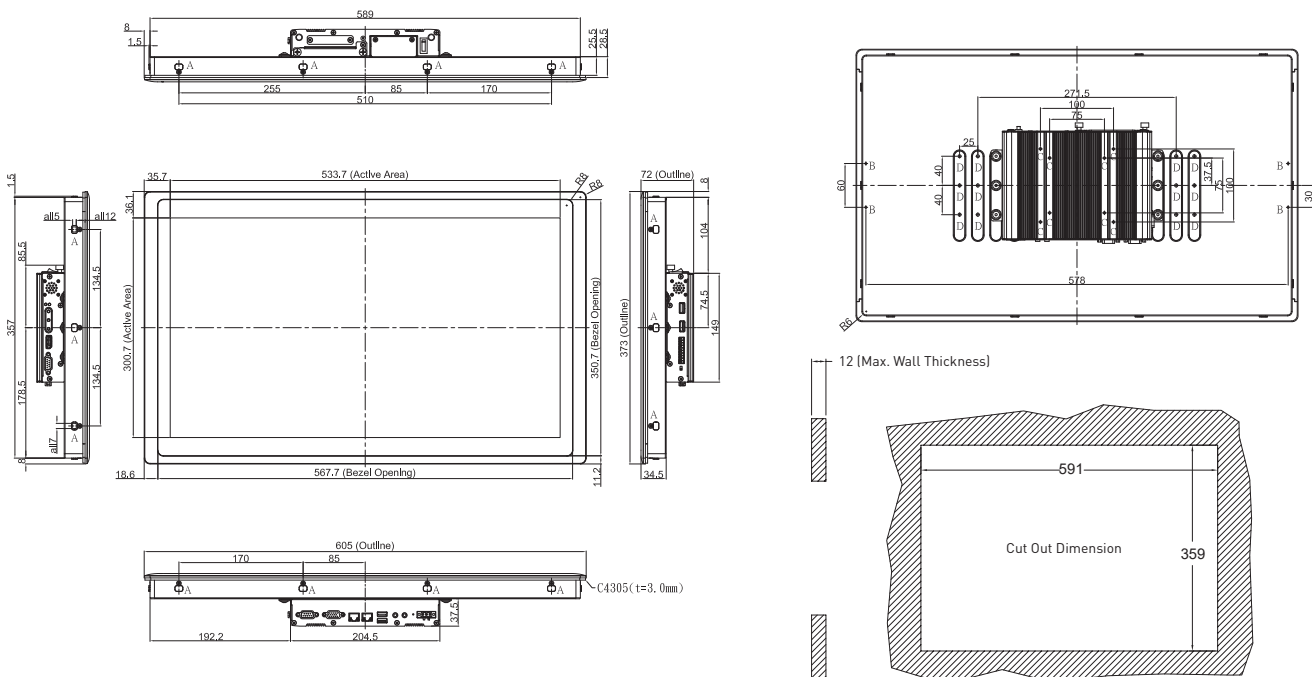

Unit: mm

Ordering Information

Available Models

Model No.	Description
CS-W124C-R10/P1001-R10	24" TFT-LCD Full HD 16:9 Panel PC with Projected Capacitive Touch and Intel® Atom™ E3845 Quad Core PC Module, 4x USB, 2x COM, 1x VGA, 1x DisplayPort

Package Checklist

• CS-W124C/P1001 Panel PC x 1	• Power Terminal Block Connector x 1
• Panel Mounting Kit x 1	• Screw Pack x 1
• Utility DVD Driver x 1	• DIO Terminal Block Connector x 1

Optional Modules

Model No.	Description
URM01	Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor

Optional Accessories

Model No.	Description
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)



Distributore per l'Italia: Contradata Milano S.r.l.

Via Solferino 12 - 20900 Monza (MB) - Italy
Tel: (+39) 039-230.14.92 Email: info@contradata.it

www.contradata.it