


Pin header

mSATA

Features

- Supports SATA to dual SATA III Port Multiplier.
- Supports H/W RAID 0/1 over SATA.
- Pin header for Access/Error LED connection.
- 3 years warranty.
- Industrial design, manufacture in innodisk Taiwan

Mechanical Drawing

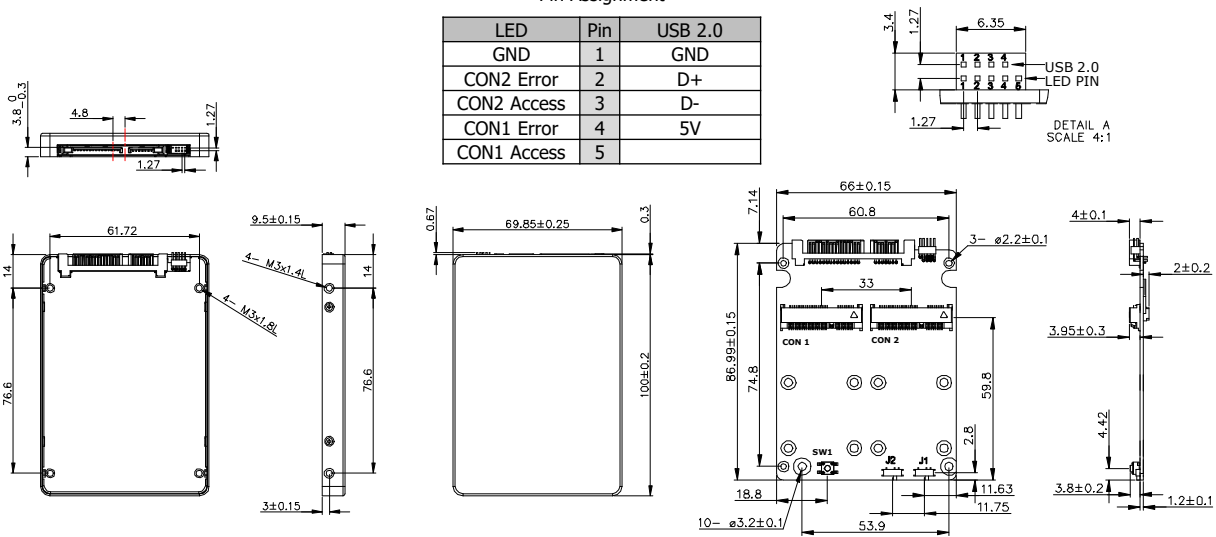

Specifications

| | |
|-------------------|--|
| Form-Factor | 2.5" SSD |
| Input I/F | SATA III |
| Output I/F | SATA III |
| Output Connector | mSATA x 2, Pin Header 9Pin x 1 |
| TDP | 2.45W (5V x 498mA) |
| Dimension (WxLxH) | 69.85 x 100 x 9.5mm, Weight: 80g |
| Temperature | Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C |
| Environment | Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms |
| Notes | 1. RAID Mode Setting: [J1:J2] RAID0: 2:2, RAID1: 1:2, PM: 1:1 2. Press tact switch SW1 for reset. |

© 2015 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

Order information E2SS-32R1-C1 2.5" to Dual SATA III RAID Module

Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it

