


Pin header  
M.2 Key-B

### Features

- Supports SATA to dual SATAIII Port Multiplier.
- Supports H/W RAID 0/1 over SATA.
- Pin header for Access/Error LED connection.
- 3 years warranty.
- Industrial design, manufacture in innodisk Taiwan.

### Mechanical Drawing

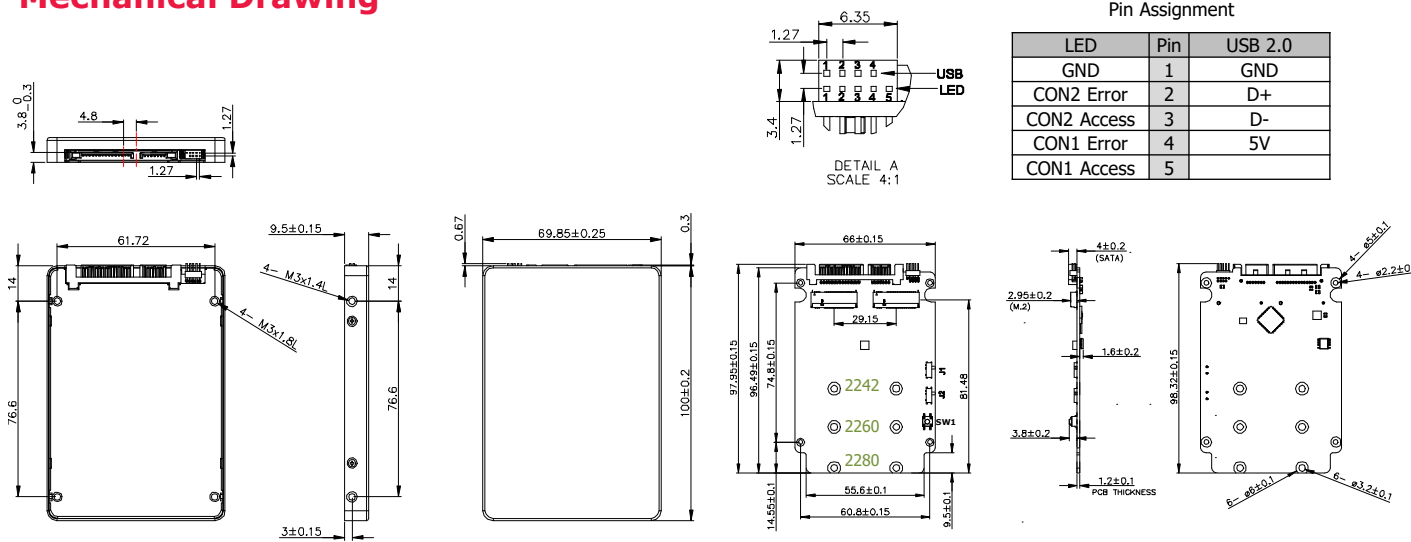

### Specifications

Form-Factor	2.5" SSD
Input I/F	SATA III
Output I/F	SATA III
Output Connector	M.2 Key-B 2242/2260/2280 x 2
TDP	4W (5V x 800mA)
Dimension (WxLxH)	69.85 x 100 x 9.5mm, Weight: 80g
Temperature	Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	1. RAID Mode Setting: [J1:J2] RAID0: 2:2, RAID1: 1:2, PM: 1:1 2. Press tact switch SW1 for reset.

© 2014 Innodisk Corporation.  
All right reserved. Specifications  
are subject to change without  
prior notice.

**Order information** E2SS-32R2-C1: 2.5" to Dual M.2 RAID Module

May 17, 2020