

# DS-1002

4th Gen. Intel® Core™ i3 / i5 / i7 Superior Performance Fanless Computer  
Integrate Q87 Chipset and 2x PCI/ PCIe Expansion



## Key Features

- Support 4th Gen. Intel® Core™ i3 / i5 / i7 desktop processor (LGA1150) and Intel® Q87 chipset
- 2x DDR3 / DDR3L SO-DIMM max. up to 32GB
- Three independent display from 1x DVI-I and 2x DisplayPort
- 2x Intel® GbE, support Wake-on-LAN and PXE
- 4x USB 3.0 and 4x USB 2.0
- 6x RS232/422/485 port with 5V/12V power, isolated 4x DI & 4x DO
- 2x 2.5" SATA SSD/HDD bay, 2x mSATA (1x shared by Mini-PCle socket), 1x CFast card and 1x SIM card socket
- 9~48VDC power input, support AT/ATX mode
- 2x Mini-PCle Slots for Wi-Fi, GSM, or I/O Expansion
- 2x PCI or 1x PCIe x1 and 1x PCIe x16 or 1x PCI and 1x PCIe x16 Expansion

## »» Overview

DS-1000 series is a fanless embedded system integrated with 4th generation Intel® Core™ i3 / i5 / i7 LGA1150 socket type processor, Intel® Q87 express chipset, rich I/O, and supports wide range (9~48V) DC power input. The front access designed provides fast change capability of hard drive, CMOS battery, CFast card and SIM card.

With flexible installation of internal or external fan, mounting kit, and various interface expansion modules makes DS-1000 series a functional system meets versatile requirements and different usages.

In addition, DS-1000 series is a ruggedized and safety system features completely cable-less designed, special heat dissipation, anti-vibration, build in voltage protection, reliable DC power input, reverse power protection, and industrial components selection.

Combining superior performance and innovative mechanical design, DS-1000 series is an ideal choice for industrial applications.

## »» Specifications

### Processor System

- Support 4th Generation Intel® Core™ i3 / i5 / i7, with AMI 128Mbit SPI BIOS
- Celeron® G1820TE, Dual Core, 2.2GHz, 2M Cache
- Core™ i3-4330TE, Dual Core, 2.4GHz, 4M Cache
- Core™ i5-4570TE, Dual Core, 2.7GHz, 4M Cache
- Core™ i7-4770TE, Quad Core, 2.3 GHz, 8M Cache

### Chipset

- Intel® Q87 chipset

### Memory

- 2x 204-Pin DDR3 / DDR3L-1333MHz / 1600MHz SO-DIMM (un-buffered and non-ECC), max. up to 32GB

### Display

#### Triple Display

- 1x DVI-I and 2x DisplayPort
- 1x VGA (w/ DVI to VGA Adapter) and 2x DisplayPort
- 1x VGA (w/ DVI Split Cable), 1x DVI-D, and 1x DisplayPort

### Expansion

- 1x PCIe x1 and 1x PCIe x16 for DS-1002-EE Only
- 1x PCI and 1x PCIe x16 for DS-1002-PE Only
- 2x PCI for DS-1002-PP Only
- 2x Full-size Mini PCIe Socket for Wi-Fi/3.5G/Expansion Module
- 3x Universal I/O Bracket

### Watchdog Timer

- Software Programmable Supports 1~255 sec. System Reset

### Ethernet

- 1x Intel® 82583V GbE LAN Port, Support Wake-on-LAN and PXE
- 1x Intel® i217LM GbE LAN Port, Support Wake-on-LAN and PXE

### Audio

- Codec: Realtek ALC888S
- 1x Mic-in and 1x Speak-out

### Storage

- 2x 2.5" SATA HDD Bay (1x External Removable, 1x Internal)
- 2x Internal mSATA Slot (1x Shared by Mini-PCle Socket)
- 1x External CFast Socket
- 1x External SIM Card Socket

### I/O Ports

- 4x USB 3.0 Port
- 4x USB 2.0 Port
- 1x 4 Isolated DI & 4 Isolated DO Port
- 6x DB9 for COM1~6, Support RS232/422/485 with Auto Flow Control
- 1x PS/2 Port
- 2x Antenna Hole
- 1x Power Switch
- 1x AT/ATX Switch
- 1x External Battery Holder
- 1x External Fan Connector
- 1x Remote Power Connector

### Digital Input & Output

- 4x Digital Input (Source Type)
  - Input Voltage (Dry Contact):
    - Logic 0: Close to GND
    - Logic 1: Open
  - Input Voltage:
    - Logic 0: 3V max.
    - Logic 1: 5V min. (DI to COM-)
- 4x Digital Output
  - Supply Voltage: 5~30VDC
  - Sink Current: 200 mA Max. Per Channel

### Power

- Support AT, ATX Mode
- 1x 3-pin Terminal Block Connector with Power Input 9~48VDC
- 1x Optional AC/DC 24V/5A, 120W Power Adapter

### Environment

- Operating Temperature: Ambient with Air Flow: -10°C to 60°C (with Industrial Grade Peripherals)
- Storage Temperature: -20°C to 80°C
- Relative Humidity: 10%~95% (non-condensing)

### Physical

- Dimension (WxDxH, mm): 227 x 261 x 126 mm
- Weight: 5.70 kg
- Construction: Extruded Aluminum with Heavy Duty Metal
- Mounting: Wall


### Operating System

- Windows® 8
- Windows® 7
- Windows® Embedded Standard 7


### Certification

- CE
- FCC Class A

## External I/O Mechanical Layout

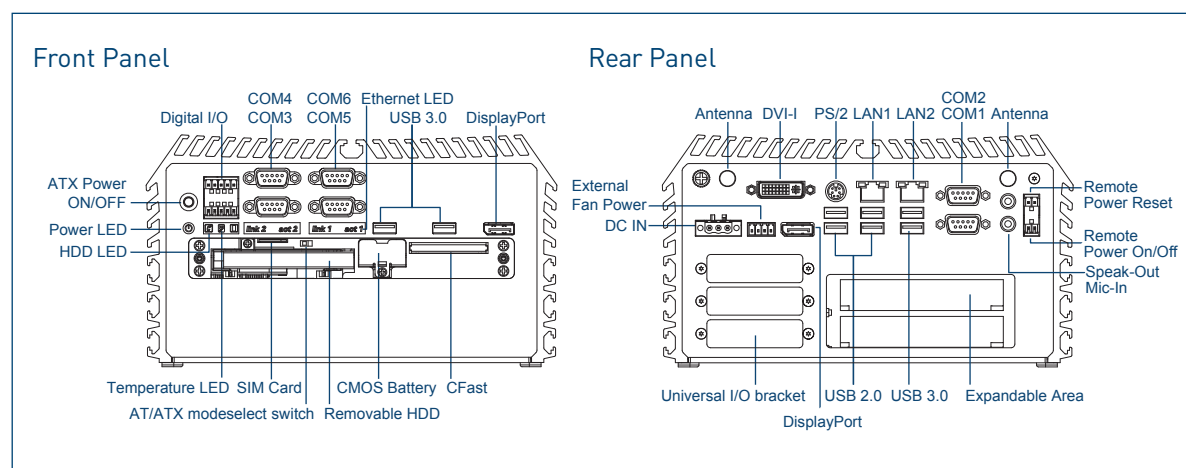

## Dimensions

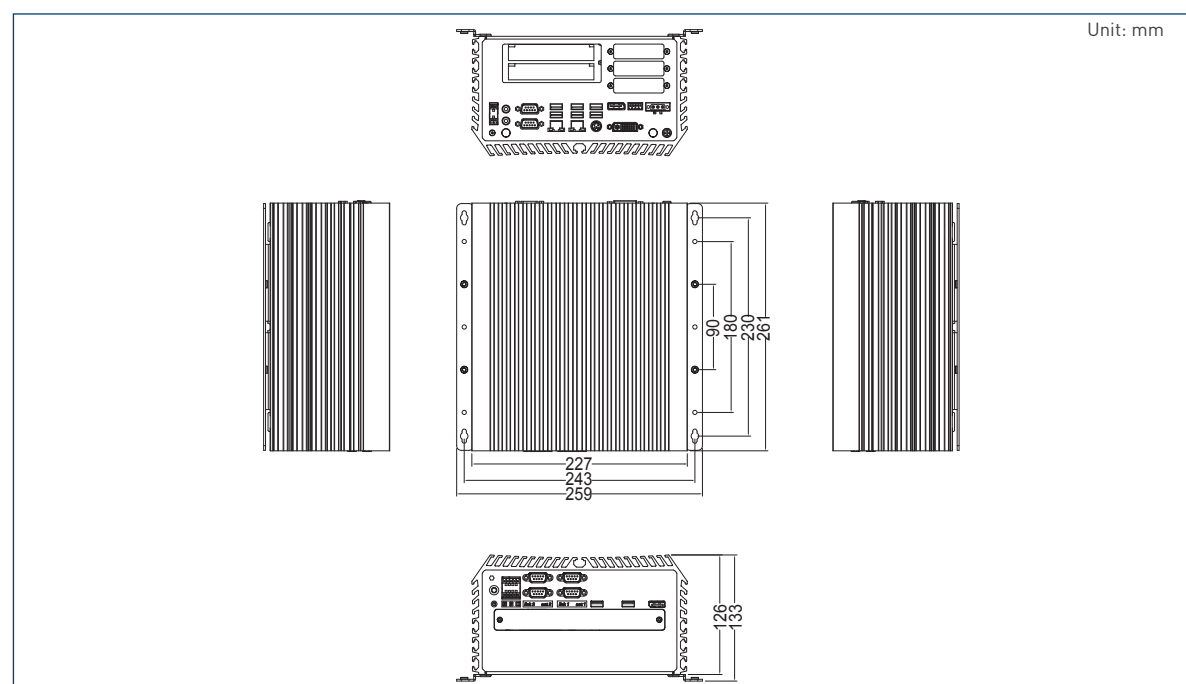

## »» Ordering Information

### Available Models

Model No.	Product Description
<b>DS-1002-PP-R10</b>	4th Gen. Intel® Core™ i3 / i5 / i7 Superior Performance Fanless Computer Integrate Q87 Chipset and 2x PCI Expansion
<b>DS-1002-EE-R10</b>	4th Gen. Intel® Core™ i3 / i5 / i7 Superior Performance Fanless Computer Integrate Q87 Chipset, 1x PCIe1 Expansion and 1x PCIe16 Expansion
<b>DS-1002-PE-R10</b>	4th Gen. Intel® Core™ i3 / i5 / i7 Superior Performance Fanless Computer Integrate Q87 Chipset, 1x PCI Expansion and 1x PCIe16 Expansion

### Package Checklist

- DS-1002 Embedded System x 1
- Utility DVD Driver x 1
- DIO Terminal Block Connector (Female) x 2
- Power Terminal Block Connector (Female) x 1
- Remote Power Terminal Block Connector (Female) x 2
- External Fan Terminal Block Connector (Female) x 1
- DVI-I to VGA Adapter x 1
- Screw Pack x 1
- Wall Mount Kit x 1
- Heat Sink Pack x 1

### Optional Accessories

Model No.	Description
<b>GS120A24-CIN</b>	Adapter AC/DC 24V 5A 120W with 3pin Terminal Block Plug 5.0mm Pitch,GS120A24-P1M
<b>SL2-SL3</b>	US 2 heads power cord, US B type to IEC C13,SVT 18AWG/3C Black 1.8M SL-2+SL-3
<b>SL6-SL3</b>	EU 2 heads power cord, EU G type to IEC C13, H05VV-F 0.75mm2/3G Black 1.8M SL-6+SL-3
<b>QP026-SL3</b>	UK 2 heads power cord, UK I type to IEC C13, H05VV-F 0.75mm2/3G Black 1.8M QP026+SL-3
<b>59381560000E</b>	MINI-DIN(M) (PS/2 KB+MS) TO MINI-DIN(F) (PS/2 KB)+MINI-DIN(F) (PS/2 MS) L:10CM, 59381560000E
<b>N0307-140507-01</b>	DVI-I(M) TO DVI-D(F) + VGA(F) Cable, L=200mm, N0307-140507-01