

Datasheet

# 2.5" SATA SSD

## 3TG6-P\_AES series

- 2.5" SATA III solution for industrial field
- High IOPS
- iSMART disk health monitoring
- AES-256 encryption
- End to end data path protection
- iData Guard for abnormal power failure
- iCell technology for data protection (optional)
- iPower Guard for protecting unstable start up and shut down



## Introduction

Innodisk 2.5" SATA SSD 3TG6-P is SATA III 6Gb/s solid state disk, which delivers excellent performance, especially in random data transfer rate, and which offers reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field. 3TG6-P 2.5" SSD not only performs unmatched performance, but also designed with Innodisk owned technical knowhow to ensure the data integrity and highest levels of reliability.


**innodisk**

**Distributore Autorizzato per l'Italia:**

**Contradata Milano S.r.l.**

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



[www.contradata.it](http://www.contradata.it)

# 2.5" SATA SSD


## 3TG6-P\_AES series

### Drawing

Contact us for more information about the 2.5" SATA SSD 3TG6-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

\* DGS25-XXXM72EXXQF (128GB-4TB)

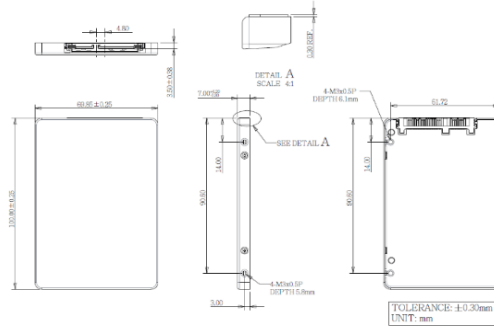

### Specifications

Interface	SATA III
Flash Type	3D TLC
Capacity	128GB~4TB
Max. Channels	4
Sequential R/W (MB/sec, max.)*	560 / 510 MB/s
4KB Random (QD32) R/W (IOPS)*	82000 / 68000
Max. Power Consumption	5.7W
Thermal Sensor	✓
External DRAM Buffer	✓
AES encryption	✓
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	69.8 X 100.0 X 6.8 mm <sup>3</sup> (128GB ~ 4TB)
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours
* Performance based on CrystalDiskMark 5.1.2 with file size 1000MB of Queue Depth 32	
* Performance may vary based on various firmware version or test platform	

© 2017 Innodisk Corporation. All right reserved. Specifications are subject to change without prior notice.

20180703

### Ordering Information (Please refer to TPS for detail)

Operation Temp.	128GB	256GB	512GB	1TB	2TB	4TB
Standard Grade (0°C ~ +70°C) (64 layers 3D TLC)	DGS25-A28M72EC*QF	DGS25-B56M72EC*QF	DGS25-C12M72EC*QF	DGS25-01TM72EC1QF	DGS25-02TM72ECAQF	DGS25-04TM72ECBQF
Industrial Grade (-40°C ~ +85°C) (64 layers 3D TLC)	DGS25-A28M72EW*QF	DGS25-B56M72EW*QF	DGS25-C12M72EW*QF	DGS25-01TM72EW1QF	DGS25-02TM72EWAQF	DGS25-04TM72EWBQF
Standard Grade (0°C ~ +70°C) (112 layers 3D TLC)	DGS25-A28M72KCCDF	DGS25-B56M72KCCQF	DGS25-C12M72KCCQF	DGS25-01TM72KCAQF	DGS25-02TM72KCAQF	DGS25-04TM72KCAQF

\*. PCB version control




Distributore Autorizzato per l'Italia:

Contradata Milano S.r.l.

Via Solferino 12, 20900 Monza (MB) - Italy

Tel: (+39) 039-230.14.92 | Email: info@contradata.it



www.contradata.it