


PCIE-Q170

Full-size PICMG 1.3 CPU Card supports LGA1151 Intel® Core™ i7/i5/i3/Pentium®/ Celeron® CPU per Intel® Q170, DDR4, VGA/iDP, Dual Intel® PCIe GbE, PCIe Mini, mSATA, USB 3.2 Gen 1 (5Gb/s), SATA 6Gb/s, HD Audio, Intel® AMT and RoHS



Four 288-pin DDR4 SDRAM Supported

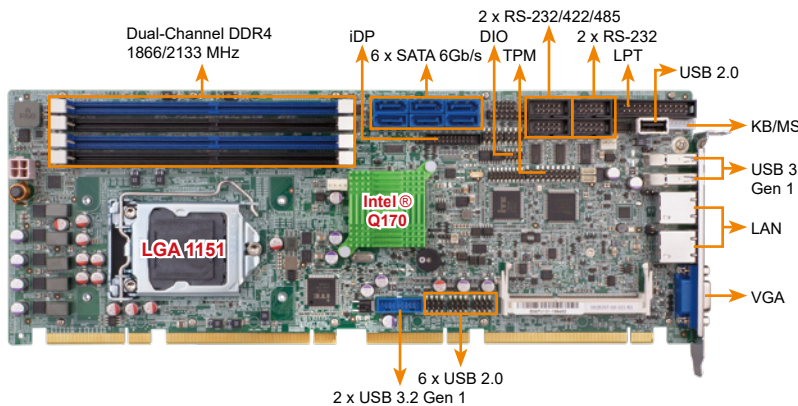

RAID 0, 1, 5, 10 function compatible with six ports of SATA 6Gb/s



Specifications

- ◆ CPU
 - LGA 1151 socket supports Intel® 6th/7th generation Core™ i7/i5/i3, Pentium® or Celeron® processor
- ◆ Chipset
 - Intel® Q170
- ◆ Memory
 - Four 288-pin 1866/2133 MHz dual-channel unbuffered DDR4 DIMMs support up to 64GB
- ◆ BIOS
 - UEFI BIOS
- ◆ Graphic Engine
 - Intel® HD Graphics Gen 9 supports DX11/12, OpenCL 2.x and OpenGL 4.3/4.4
 - Decode/Encode for HEVC, VP8, VP9, VDENC
- ◆ Display Output
 - Dual independent display
 - 1 x VGA (up to 1920x1200@60 Hz)
 - 1 x iDP interface for HDMI, LVDS, VGA, DVI and DisplayPort (up to 3840x2160@60 Hz)
- ◆ Ethernet
 - LAN1: Intel® I219LM Clarkville-V with Intel® AMT 11.0 supported
 - LAN2: Intel® I210 PCIe controller
- ◆ External I/O Interface
 - 2 x USB 3.2 Gen 1 (5Gb/s)
- ◆ Internal I/O Interface
 - 1 x KB/MS (1x6 pin)
 - 1 x LPT (2x13 pin)
 - 1 x mSATA (SATA & USB signal)
 - 1 x USB 2.0 (180° Type-A)
 - 2 x RS-232 (2x5pin, P=2.54)
 - 2 x RS-232/422/485 (2x5 pin, P=2.54)
 - 2 x USB 3.2 Gen 1 (5Gb/s) (2x10 pin)
 - 6 x SATA 6Gb/s (RAID 0/1/5/10 supported)
 - 6 x USB 2.0 (2x4 pin, P=2.54)
- ◆ Front Panel
 - 1 x Front Panel (1x10 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED
 - 2 x LAN LED (1x2 pin)
- ◆ Audio
 - Support 7.1 channel HD Audio by IEI AC-KIT-888S-R10 kit
- ◆ TPM
 - 1 x TPM (2x10 pin)
- ◆ SMBus
 - 1 x SMBus (1x4 pin)
- ◆ I²C
 - 1 x I²C (1x4 pin)
- ◆ Expansion
 - 16-lane PCIe link from CPU via golden finger:**
 - Supports one PCIe x16, or two PCIe x8, or one PCIe x8 + two PCIe x4 on the backplane (configured via BIOS)
 - 4-lane PCIe link from PCH via golden finger:**
 - Supports four PCIe x1 slots or one PCIe x4 slot on the backplane (configured via BIOS switch)
 - 1 x Full/Half-size PCIe Mini card slot
 - Four PCI signal via golden finger**
- ◆ Watchdog Timer
 - Software programmable, supports 1~255 sec. system reset
- ◆ Digital I/O
 - 8-bit digital I/O (2x5 pin)
- ◆ Fan Connector
 - 1 x CPU smart fan (1x4 pin)
 - 1 x System smart fan (1x3 pin)
- ◆ Power Supply
 - 5V/12V, AT/ATX support
- ◆ Power Consumption
 - 5V@3.12A, 12V@6.85A, 3.3V@1.13A, 5VSB@0.15A
 - (Intel® Core™ i7-6700K 4.0GHz CPU with 64GB (16GB x 4) 2133 MHz DDR4 memory)
- ◆ Operating Temperature
 - 20°C ~ 60°C
- ◆ Operating Humidity
 - 5% ~ 95%, non-condensing
- ◆ Dimensions: 338 mm x 126 mm
- ◆ Weight: GW: 1000g / NW: 420g
- ◆ CE/FCC compliant

Features

- PICMG 1.3 full-size CPU Card
- LGA 1151 Intel® 6th/7th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Four 288-pin 1866/2133MHz dual-channel DDR4 UDIMMs support up to 64GB
- Supports dual independent display by VGA & internal DP pin header
- Supports PCIe Mini device & mSATA via PCIe Mini card slot
- Intel® PCIe GbE with Intel® AMT 11.0 supported
- Supports RAID 0, 1, 5, 10 function via SATA 6Gb/s
- TPM 1.2 & 2.0 hardware security function supported by TPM module

Packing List

1 x PCIE-Q170 single board computer	1 x Mini jumper pack
1 x SATA cable	1 x QIG

Ordering Information

Part No.	Description
PCIE-Q170-R10	Full-size PICMG 1.3 CPU Card supports LGA1151 Intel® Core™ i7/i5/i3/Pentium®/Celeron® CPU per Intel® Q170, DDR4, VGA/iDP, Dual Intel® PCIe GbE, PCIe Mini, USB 3.2 Gen 1 (5Gb/s), SATA 6Gb/s, mSATA, HD Audio, iAMT and RoHS
19800-000049-RS	LPT flat cable, 240mm, P=2.54
19800-000075-RS	PS/2 KB/MS cable with bracket, 220mm, P=2.0
CB-USB02-RS	Dual port USB 2.0 cable with bracket, 300mm, P=2.54
19800-010500-200-RS	USB 3.2 Gen 1 (5Gb/s) cable with bracket, 450mm
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-000702-200-RS	RS-232 cable, 230mm, P=2.54
32205-003800-300-RS	RS-422/485 cable, 200mm, P=2.0
AC-KIT-888S-R10	7.1 channel HD Audio kit with Realtek ALC892 support dual audio streams
CF-1150SA-R10	Special cooler kit for LGA1150, High-performance compatible, 95W
CF-1150SB-R11	Special cooler kit for LGA1150, High-performance compatible, 65W
CF-1150SC-R20	Special cooler kit for LGA1150, 1U chassis compatible, 65W
CF-1150SE-R11	Special cooler kit for LGA1150, high-performance compatible, 95W
DP-DP-R10	DisplayPort to DisplayPort converter board (for IEI iDP connector)
DP-DVI-R10	DisplayPort to DVI-D converter board (for IEI iDP connector)
DP-HDMI-R10	DisplayPort to HDMI converter board (for IEI iDP connector)
DP-LVDS-R10	DisplayPort to LVDS converter board (for IEI iDP connector)
DP-VGA-R10	DisplayPort to VGA converter board (for IEI iDP connector)